

EPC CORE

TYPE	FIG.	Dimensions(mm)					
		A	B	C	D	E	F
EPC10/8/3	1	10.2±0.2	4.05±0.1	3.4±0.16	5.0±0.1	7.6min	2.65±0.15
EPC13/13/5	2	13.3±0.3	6.6±0.2	4.6±0.15	5.6±0.15	10.5min	4.5±0.2
EPC14/14/5	2	13.5±0.3	6.8±0.2	4.6±0.2	5.5±0.2	11.0min	4.75±0.2
EPC17/17/6	2	17.6±0.38	8.55±0.2	6.0±0.15	7.7±0.15	14.3min	6.05±0.2
EPC19/19/6	2	19.1±0.48	9.75±0.2	6.0±0.15	8.5±0.15	15.8min	7.25±0.2
EPC20/18/6	1	20.0±0.3	8.8±0.2	5.6±0.15	9.0±0.15	15.1±0.25	6.3±0.15
EPC25/25/8	2	25.1±0.5	12.5±0.2	8.0±0.2	11.5±0.2	20.65min	9.0±0.3
EPC27/32/8	2	27.1±0.5	16.0±0.2	8.0±0.2	13.0±0.3	21.6min	12.0±0.3
EPC30/35/8	2	30.1±0.6	17.5±0.2	8.0±0.2	15.0±0.3	23.6min	13.0±0.3
EPC39/40/15	1	39.0±0.7	19.6±0.2	15.5±0.3	17.6±0.3	31.4±0.7	14.1±0.2
EPC46/44/20	2	46.5±0.6	22.2±0.3	19.3±0.3	20.8±0.3	37.5±0.5	15.5±0.2
EPC54/54/22	1	54.5±0.7	27.2±0.4	21.5±0.2	26.5±0.3	43.5±0.7	19.2±0.3

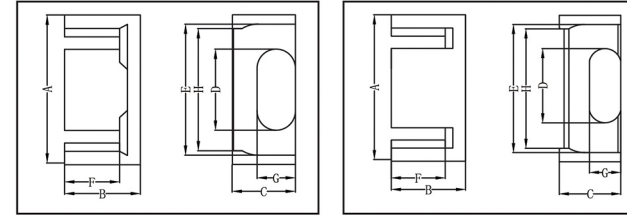
EPC CORE

FIG.1

FIG.2

G	H	Cl (mm ²)	Ae (mm ²)	Le (mm)	Ve (mm ³)	AL ± 25% (nH/N ²)			Weight g/PRS
						FW40	FW44	FW95	
1.9±0.1	5.3min	1.93	9.20	17.71	163.0	850	870	1010	1.70
2.05±0.1	8.3min	2.25	12.79	28.76	367.8	820	840	1020	2.23
2.0±0.2	9.0min	2.46	12.50	30.60	382.0	800	820	990	2.50
2.8±0.1	11.5min	1.76	22.07	38.87	857.9	1050	1080	1330	4.88
2.5±0.1	13.1min	2.06	21.82	44.91	980.0	1130	1170	1460	5.80
3.3±0.1	13.0±0.25	1.45	27.36	39.73	1086.9	1430	1480	1830	5.70
4.0±0.3	17.1min	1.32	43.01	56.84	2444.6	1650	1710	2160	15.00
4.0±0.1	18.5min	1.42	49.23	70.10	3541.0	1630	1690	2160	22.40
4.0±0.1	20.0min	1.31	57.67	75.58	4358.6	1780	1850	2380	23.00
9.7±0.2	24.7min	0.6	147.50	87.85	12958.3	3880	4020	5220	72.00
11.8±0.2	30.2±0.5	0.46	216.31	100.16	21665.2	5140	5330	6950	121.00
14.0±0.2	35.0±0.7	0.39	305.05	119.03	36309.8	6040	6270	8250	202.00