

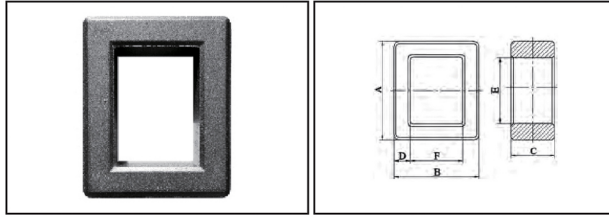
FT CORE

FIG.1

TYPE	FIG.	Dimensions(mm)						
		A	B	C	D	E	F	G
FT6.9/5.5/3	1	6.9±0.2	5.45±0.2	3.0±0.15	1.5±0.15	3.9±0.2	2.45±0.2	
FT16/13/7	1	15.6±0.2	13.4±0.2	7.0±0.2	2.8±0.15			
FT15/19/7	1	15.0±0.2	18.8±0.2	7.0±0.2	4.0±0.1			
FT17/15/3.6	4	17.8±0.2	15.0±0.2	3.6±0.2	4.8±0.2			3.8±0.2
FT17.5/24/6	2	17.5±0.4	24.0±0.3	6.0±0.2	5.5±0.25	6.5±0.4	20.0±0.3	
FT17.6/17.5/6	2	17.6±0.4	17.5±0.4	6.0±0.2	5.45±0.25	6.7±0.3	13.5±0.3	
FT18.3/19/5.5	2	18.3±0.4	19.0±0.4	5.5±0.2		8.22±0.3	14.0±0.3	
FT19/12/4.3	3	19.0±0.4	12.0±0.35	4.3±0.3		11.5±0.4	4.0±0.4	
FT19/14/5	4	19.5±0.3	14.2±0.6	5.0±0.3	4.0±0.2	12.9min	6.8min	
FT20/14/4	1	20.6±0.3	14.2±0.3	4.3±0.3	4.2±0.2			
FT21/16/5	1	21.5±0.2	15.8±0.3	4.6±0.2	4.4±0.2			3.1±0.15
FT22.8/18/5	2	22.8±0.4	18.1±0.4	5.0±0.3	4.5±0.25	14.8±0.4	9.1±0.4	4.0±0.25
FT23/19/14	1	23.0±0.5	18.8±0.2	14.0±0.2	4.0±0.1	15.0±0.2		
FT24.4/16.1/4.6	1	24.4±0.3	16.05±0.3	4.6±0.2	4.2±0.15	15.7min	7.35min	
FT24.7/21.3/5.2	2	24.7±0.5	21.3±0.5	5.2±0.2	4.9±0.25	15.9±0.4/-0.3	11.5±0.4	4.4±0.25
FT25.6/17.6/5.2	4	25.6±0.4	17.6±0.3	5.2±0.25	5.2±0.15	19.5min		3.4±0.15
FT30/20/6	4	30±0.4	19.8±0.3	6.4±0.25	6.4±0.15			3.6±0.2
FT31.6/22.8/7.8	1	31.55±0.75	22.75±0.55	7.8±0.2	6.3±0/-0	18.5±0.9/-0	9.6±0.5/-0	6.3±0.15
FT32/22.8/7.9	1	32.0±0.5	22.8±0.5	7.9±0.2	6.5±0.2	19.0±0.4	9.6±0.4	6.6±0.2

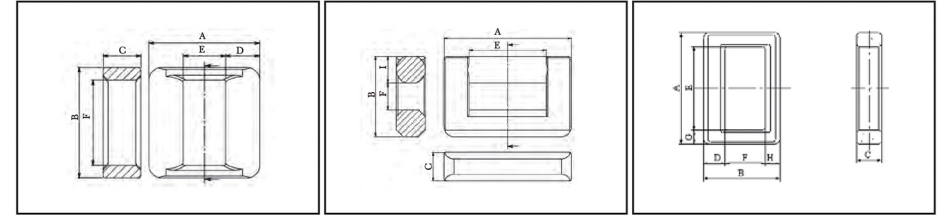
FT CORE

FIG.2

FIG.3

FIG.4

H	I	J	C1 (mm ²)	Ae (mm ²)	Le (mm)	Ve (mm ³)	AL ± 25% (nH/N ²)			Weight g/PCS
							FW5K	FW7K	FW10K	
			3.87	4.50	17.41	78.4	1700	2400	3200	0.50
19.6			2.24	19.60	4.44	917	3000	4000	5600	4.30
			2.29	28.00	64.17	1796.7	2700	4100	5400	9.30
3.0±0.2			4.29	10.80	46.40	697	1950	2930	3900	3.60
			3.19	17.90	57.05	1021.03	2100	2900	3900	5.30
			2.76	16.74	46.14	772.2	2500	3400	4500	4.00
	4.0±0.3		3.10	17.34	53.83	933.07	2200	3000	4000	4.90
			2.78	15.46	43.00	664.8	2400	3300	4500	3.50
			3.17	15.96	50.60	807.6	2100	2900	3900	4.20
			5.40	10.32	35.80	742	1600	2100	2900	4.10
			2.78	20.24	56.50	1070	2260	3390	4520	5.70
			2.93	20.71	60.71	1257.4	2300	3200	4200	6.50
			1.15	56.00	64.17	3593.4	6000	8200	10000	18.70
4.2±0.15			3.13	19.32	60.50	1168.3	2200	3000	4000	6.10
			3.34	20.83	69.57	1148.84	2000	2800	3700	7.50
2.9±0.15			3.60	17.88	65.79	14.82	1900	2600	3400	6.10
4.2±0.5			2.91	26.90	78.20	2459	2500	3150	4500	12.00
8.5max	5.3±0.2	7.9±0.2	1.56	49.85	77.62	3869.4	4400	6000	8000	20.00
			1.50	51.82	77.77	4029.8	4600	6300	8300	21.00