

SQC CORE

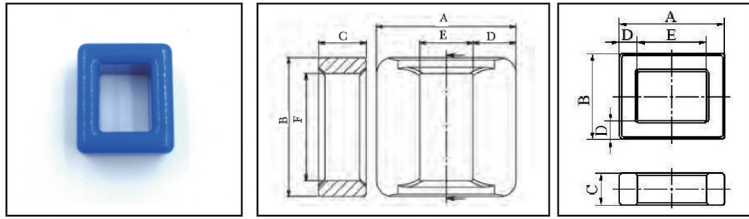


FIG.1

FIG.2

TYPE	FIG.	Dimensions(mm)					
		A	B	C	D	E	F
SQC17.5/24/6	1	17.5±0.4	24±0.3	6±0.2	5.5±0.25	6.5±0.4	20±0.3
SQC17.6/17.5/6	1	17.6±0.4	17.5±0.4	6±0.2	5.45±0.25	6.7±0.3	13.5±0.3
SQC23/19/14	2	23±0.5	18.8±0.2	14±0.2	4±0.1	15±0.2	
SQC16/13/7	2	15.6±0.2	13.4±0.2	7.0±0.2	2.8±0.1		
SQC23/19/5.5	2	23±0.4	18.8±0.2	5.5±0.2	4±0.2		
SQC18.3/19/5.5	2	18.3±0.4	19±0.4	5.5±0.2		8.22±0.3	14±0.3
SQC21/19/9	3	21±0.2	18.8±0.2	9±0.2	4±0.1		
SQC32/23/8	4	32±0.5	22.8±0.5	7.9±0.2	6.5±0.2	18.6min	9.2min
SQC23/20/7	5	23.0±0.4	19.8±0.4	7±0.2	4.62±0.15	14.8min	10.36min
SQC22.8/18.1/5	6	22.8±0.4	18.1±0.4	5±0.3	4.5±0.25	14.8±0.4	9.1±0.4
SQC23/19/7	2	15.0±0.2	18.8±0.2	7.0±0.2	4.0±0.1		

TYPE	FIG.	AFTER COATING					
		A	B	C	D	E	F
SQC17.5/24/6	1	18.3±0.5	24.8±0.5	6.8±0.5	6.3±0.5	5.7±0.5	19.2±0.5
SQC17.6/17.5/6	1	19.1max	19.0max	7.0max	6.45max	5.8min	12.6min
SQC23/19/14	2		19.4max	14.8max	4.9max	14.0min	
SQC16	2	16.2max	14.0max	7.6max	3.3max		
SQC23/19/5.5	2	24max	19.6max	6.3max	4.8max		
SQC18.3/19/5.5	2	19.8max	20.6max	6.5max		7.5min	13.3min
SQC21/19/9	3						
SQC32	4	33.4max	24.3max	8.8max	7.4max	17.9min	8.5min
SQC23/20/7	5						
SQC22.8/18.1/5	6	24.6max	19.9max	6.7max	6.15max	13.0min	7.3min
SQC23	2		19.4max	8.0max	4.9max	14.0min	

SQC CORE

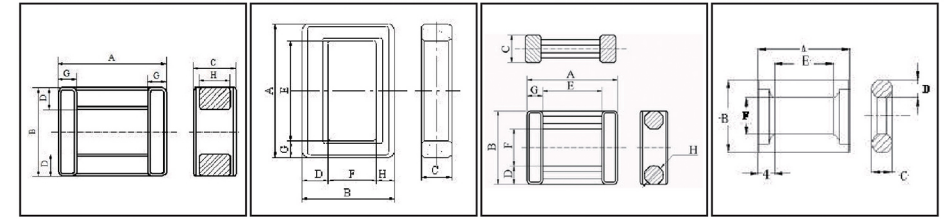


FIG.3

FIG.4

FIG.5

FIG.6

G	H	Cl (mm ³)	Ae (mm ²)	Le (mm)	Ve (mm ³)	AL ± 30% (nH/N ²)			Weight g/PCS
						FW7K	FW10K	FW15K	
		3.19	17.90	57.05	1021.03	2100	2900	3900	5.30
		2.76	16.74	46.14	772.2	2500	3400	4500	4.00
		1.15	56.00	64.17	3593.4	6000	8200	10000	18.70
		2.24	19.60	44.00	917	3000	4000	5600	4.30
	2.5±0.2	3.10	17.34	53.83	933.07	2200	3000	4000	4.90
3±0.1	7±0.2								
6.6±0.25		1.50	51.82	77.77	4029.8	4600	6300	8300	21.00
4±0.15		2.93	20.71	60.71	1257.4	2300	3200	4200	6.50

G	H	Cl (mm ³)	Ae (mm ²)	Le (mm)	Ve (mm ³)	AL ± 30% (nH/N ²)			Weight g/PCS
						FW7K	FW10K	FW15K	
		3.19	17.90	57.05	1021.03	2100	2900	3900	5.30
		2.76	16.74	46.14	772.2	2500	3400	4500	4.00
		1.15	56.00	64.17	3593.4	6000	8200	10000	18.70
		2.24	19.60	44.00	917	3000	4000	5600	4.30
	3.6max	3.10	17.34	53.83	933.07	2200	3000	4000	4.90
7.5max		1.50	51.82	77.77	4029.8	4600	6300	8300	21.00
		2.93	20.71	60.71	1257.4	2300	3200	4200	6.50