
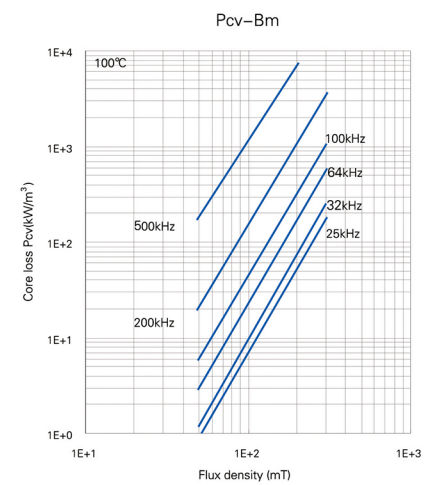
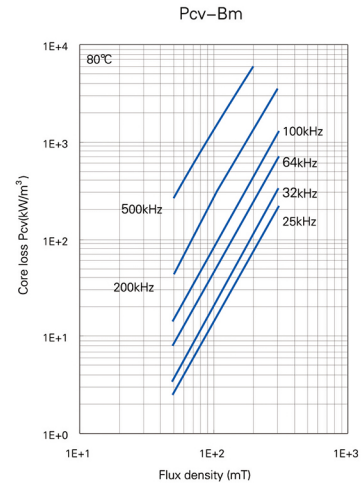
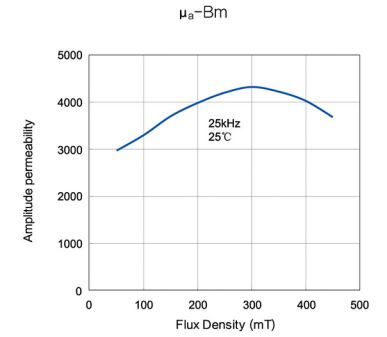
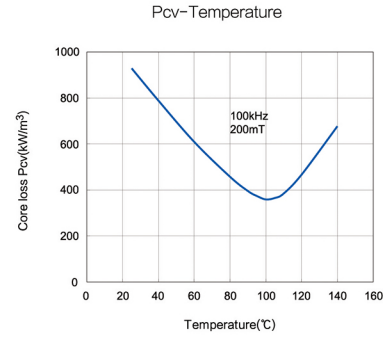
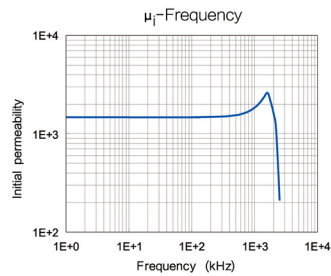
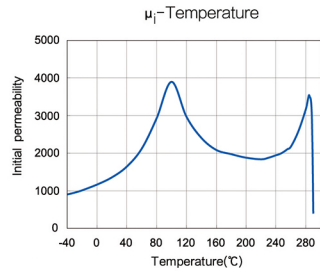
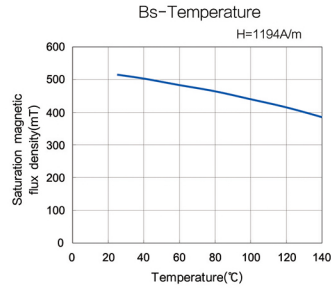


Material: FW92

Features:

- 1. Low Core Loss and High Saturation Flux Density
- 2. Higher Curie Temperature

Initial permeability	μ_i	25°C	1500±25%
Saturation magnetic flux density	Bs(mT)	25°C	510
		100°C	440
Remanence	Br(mT)	25°C	210
		100°C	70
Coercivity	Hc(A/m)	25°C	24
		100°C	13
Core loss	Pcv(kW/m ³)	25°C	1000
		100kHz 200mT	480
Curie temperature	Tc(°C)		≥285
Electrical resistivity	$\rho(\Omega\cdot m)$		3
Density	d(kg/m ³)		4,8×10 ³
Test core: Toroid(mm)			
	OD:	25	
	ID:	15	
	H:	7.5	

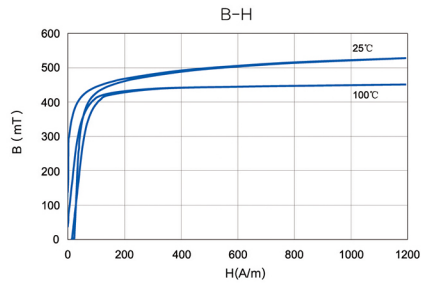

Material: FW92