



CUSTOMER TERMINAL	ROHS	Lead (Pb) -free
	YES	YES



1. Mechanical Dimensions

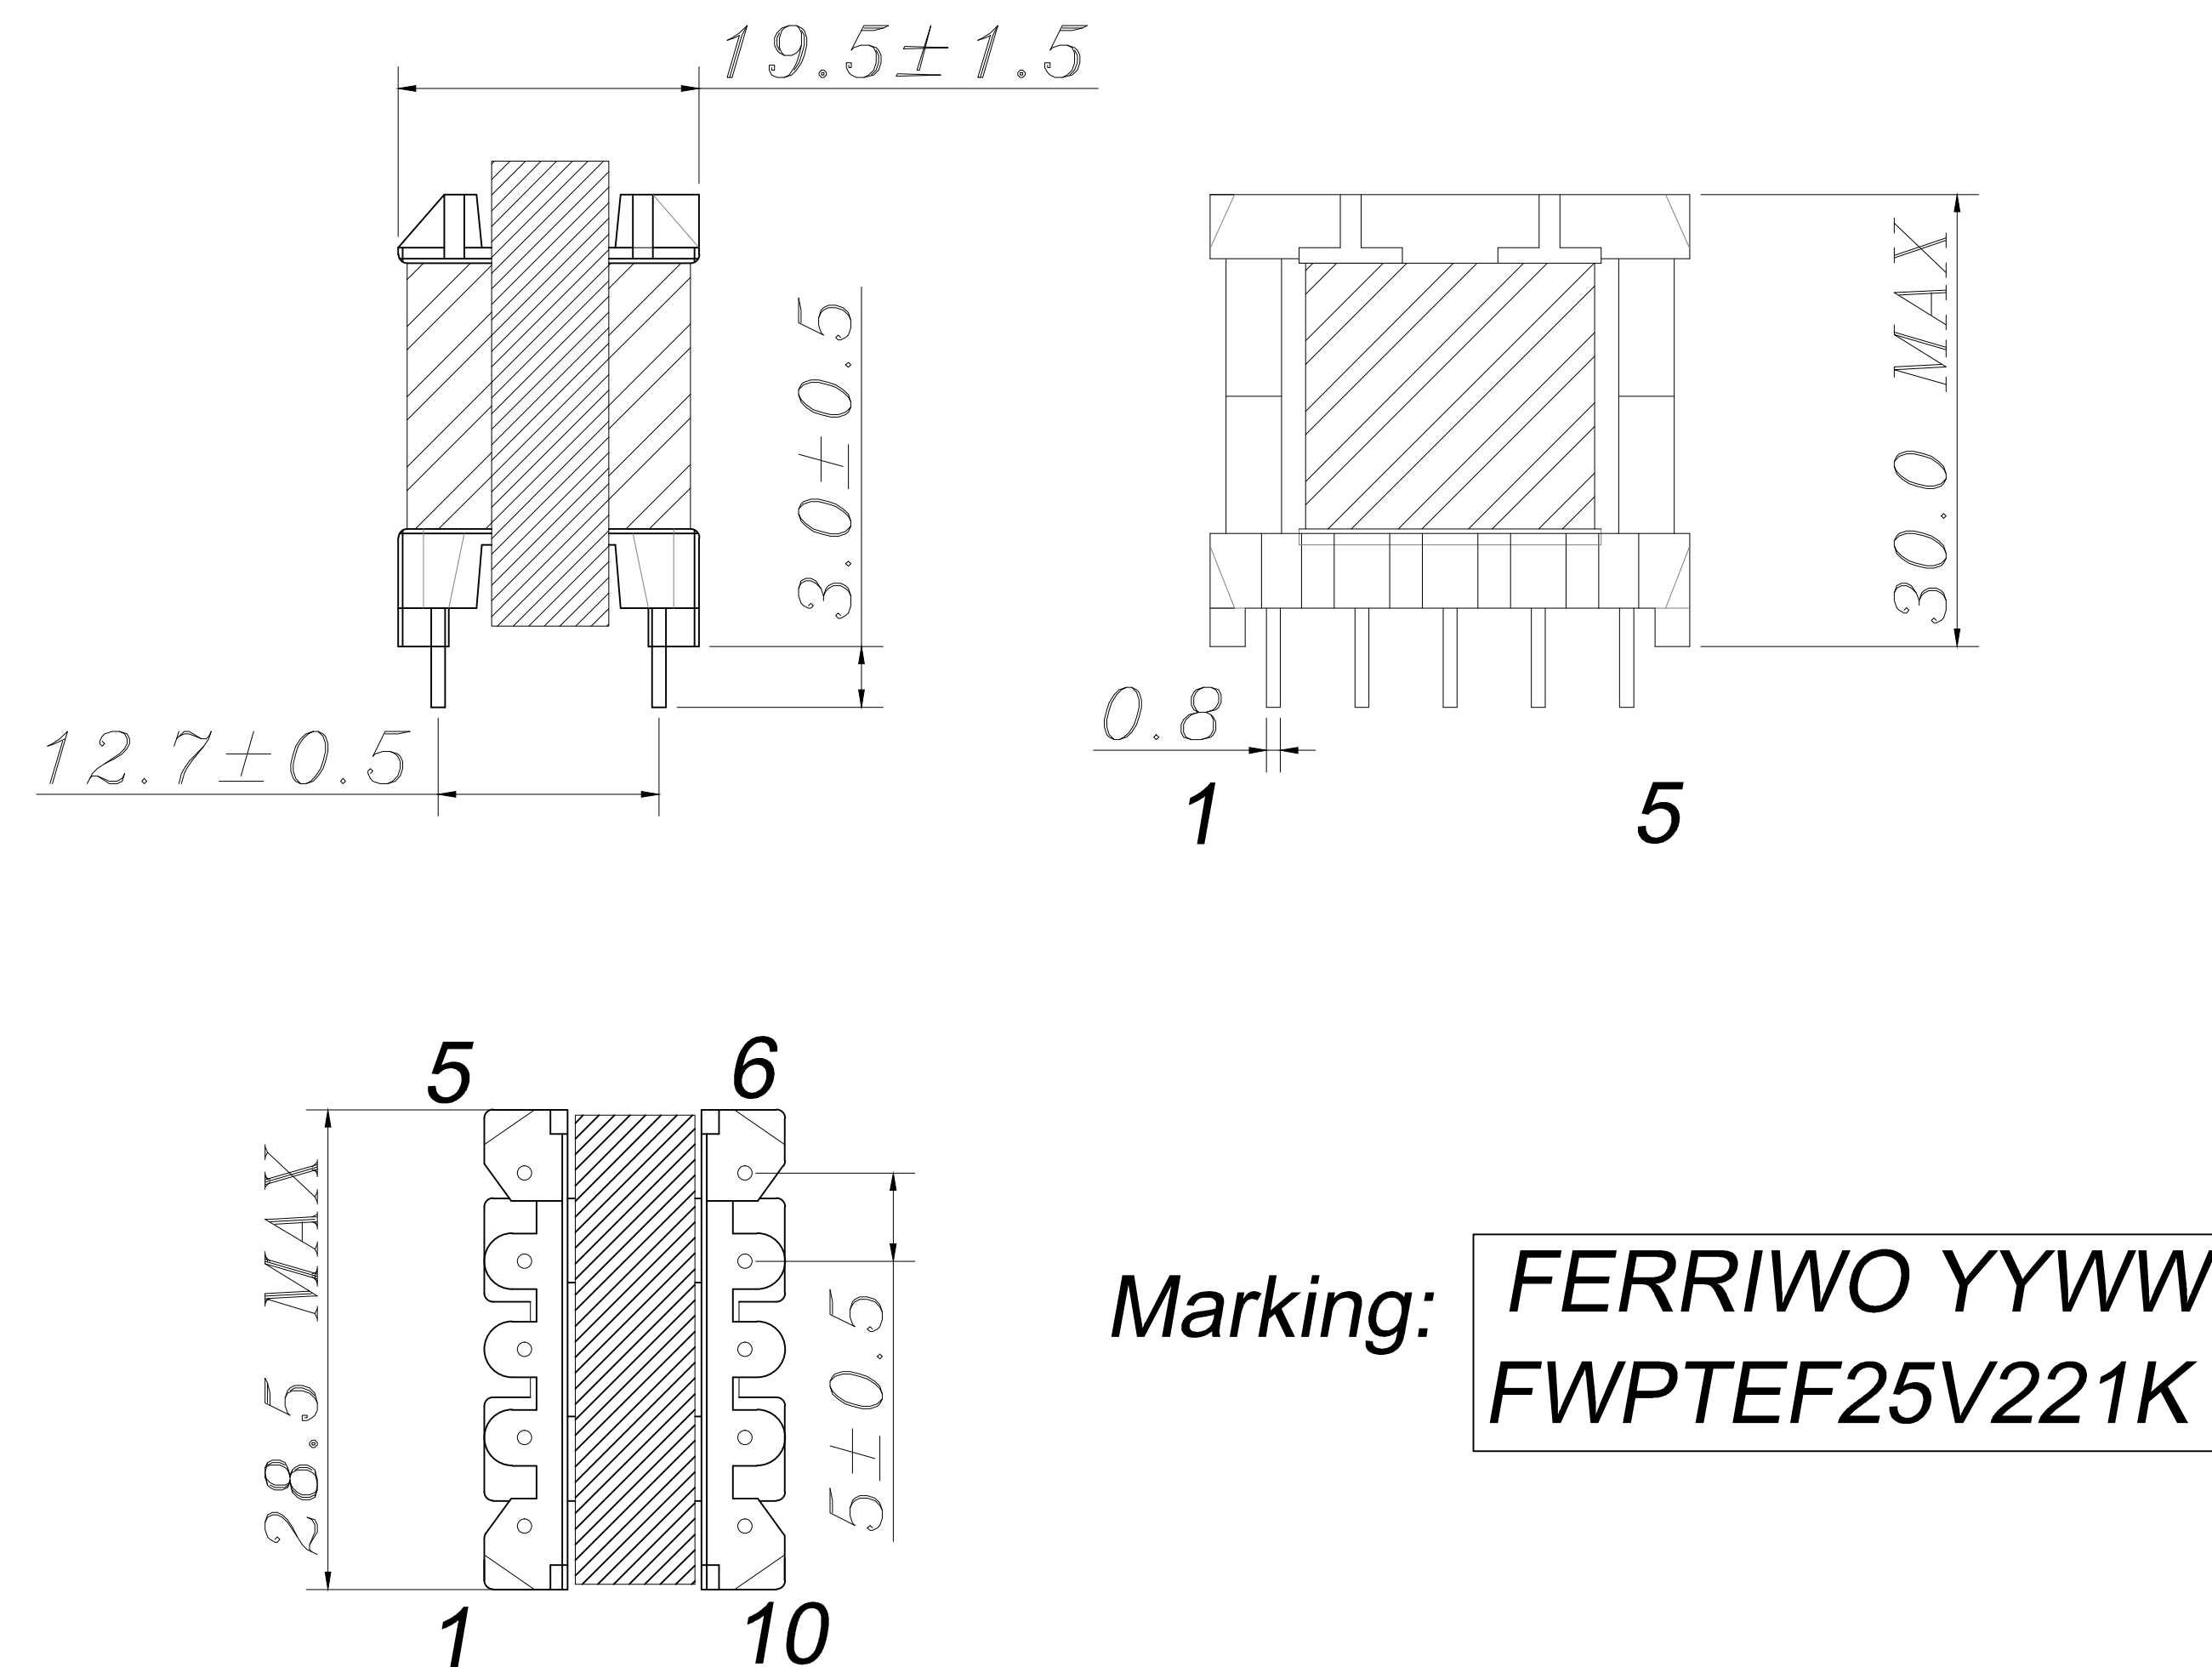

2. Schematic Diagram

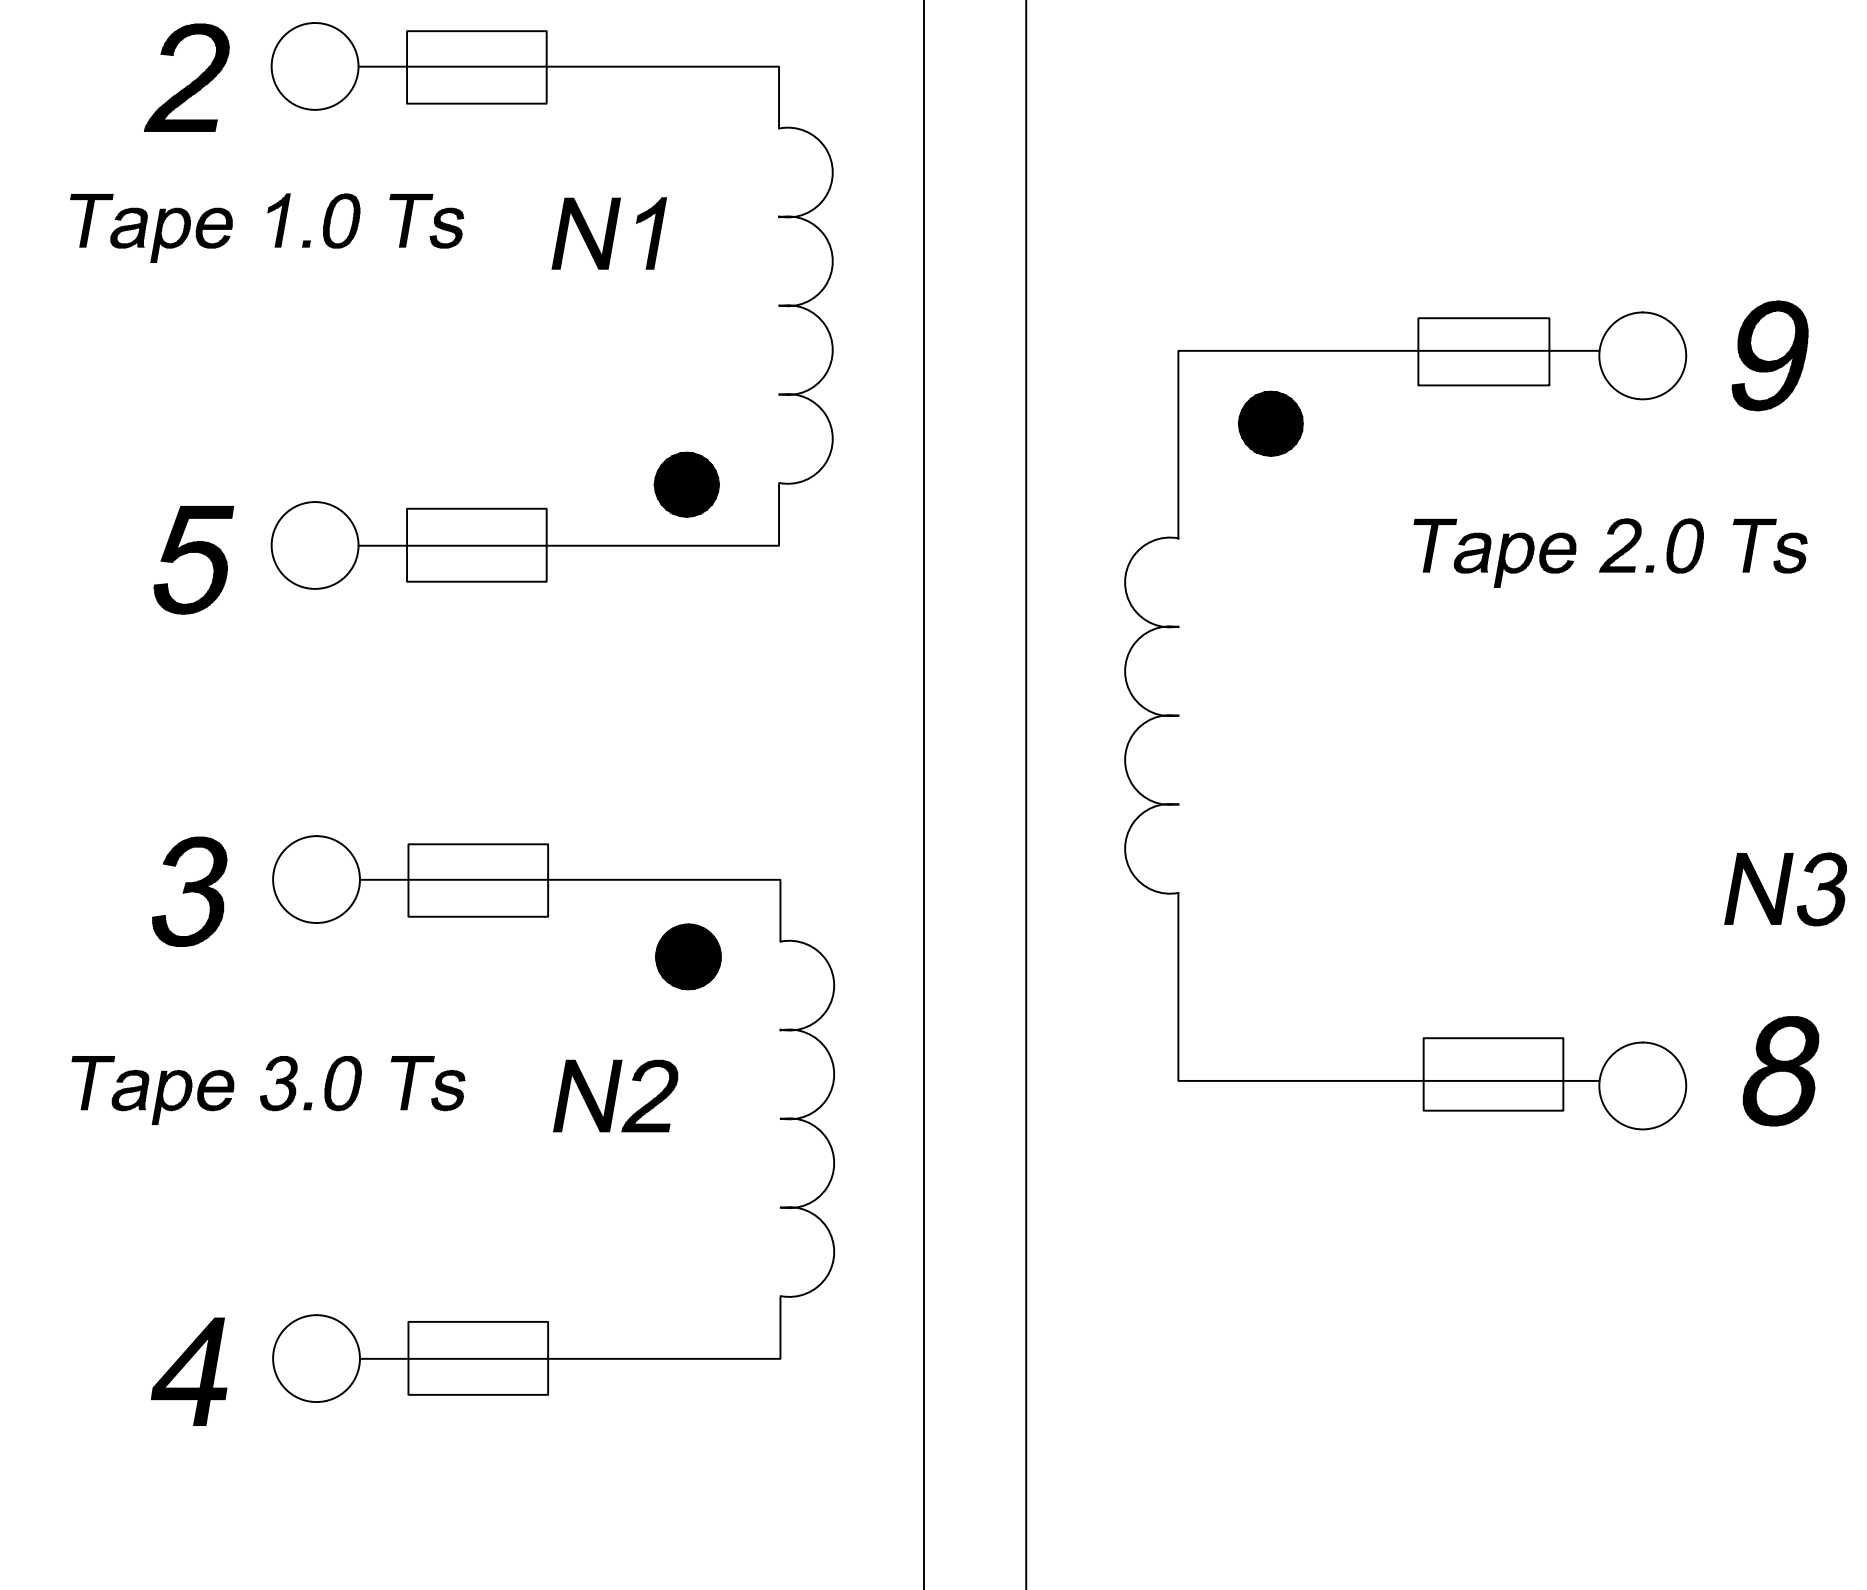

3. Material List

Core:FW44-EE25/13/7

BOBBIN:FWB2501

Wire:2UEW 0.28mm TIW-B-0.7mm 130°C

Tube: TFL tube 200°C

Operating Temperature: -30 to 115°C

4. Electrical Specification

Inductance: $L(2-5)=2.17\text{mH}\pm 10\%$ 1KHZ 1V

LK: $L(2-5)=100\sim 120\mu\text{H}$ ref. 1KHZ 1V short other pins

Hi-Pot: Coil-Coil AC 3.0KV 3mA 60S

P,S-CORE AC 500KV 3mA 5S

REV.	DATE	<p>Convention Placement</p>	DRW.	Drawing Title: TRANSFORMER	Part No:
0	00/00		CHK.		Customer P/N:
RoHS		www.ferriwo.com	APP.		Specification Sheet 1 of 1