


CUSTOMER TERMINAL	ROHS	Lead (Pb) -free
	YES	YES




1. Mechanical Dimensions

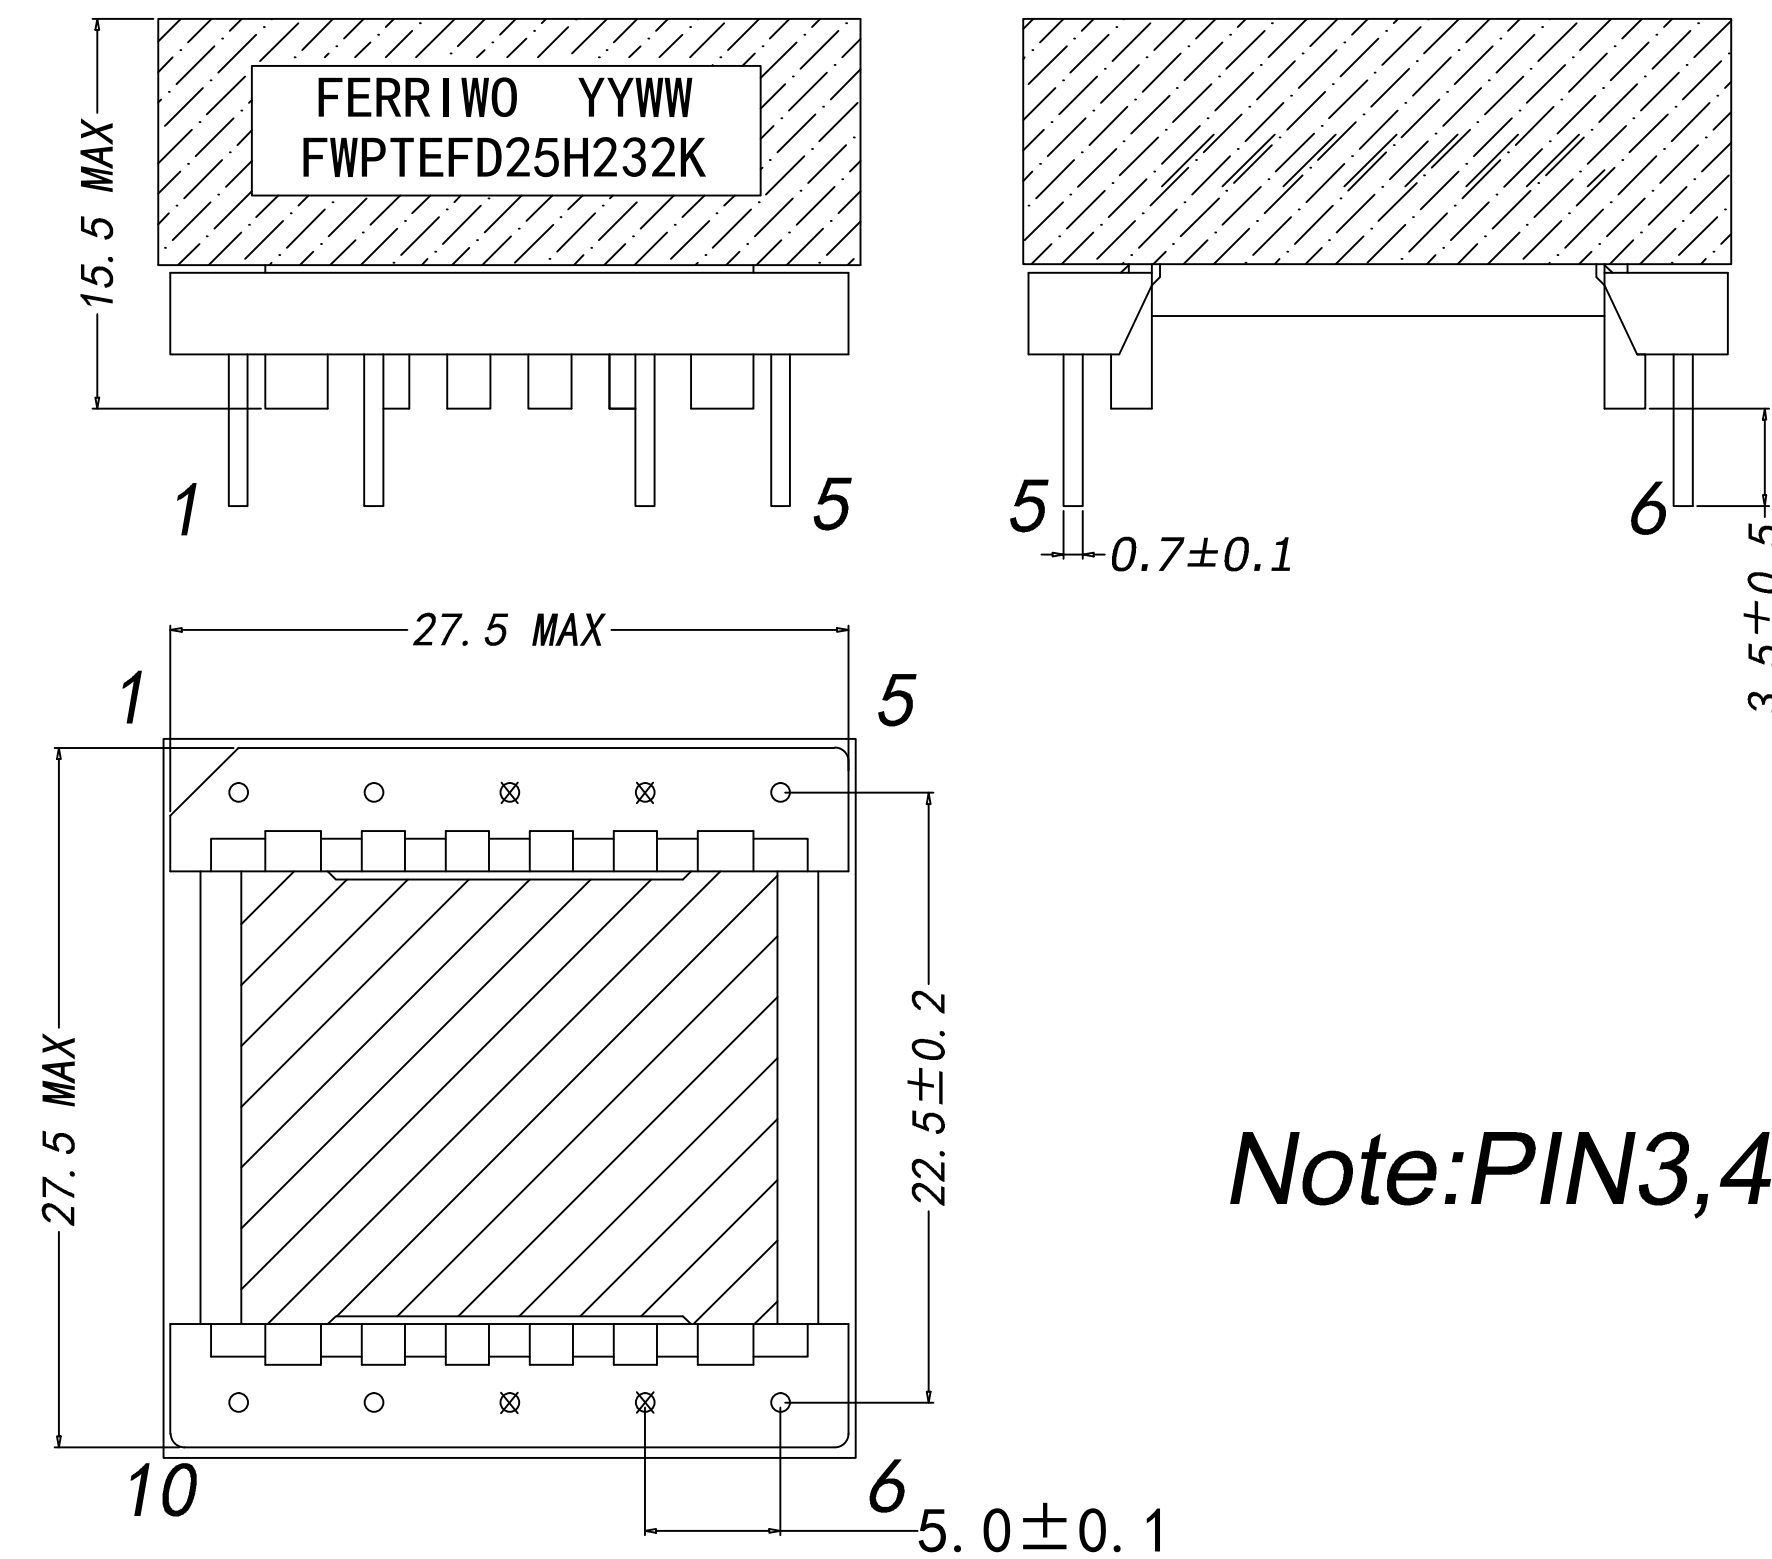

Note: PIN3,4,7,8 cut off

2. Schematic Diagram

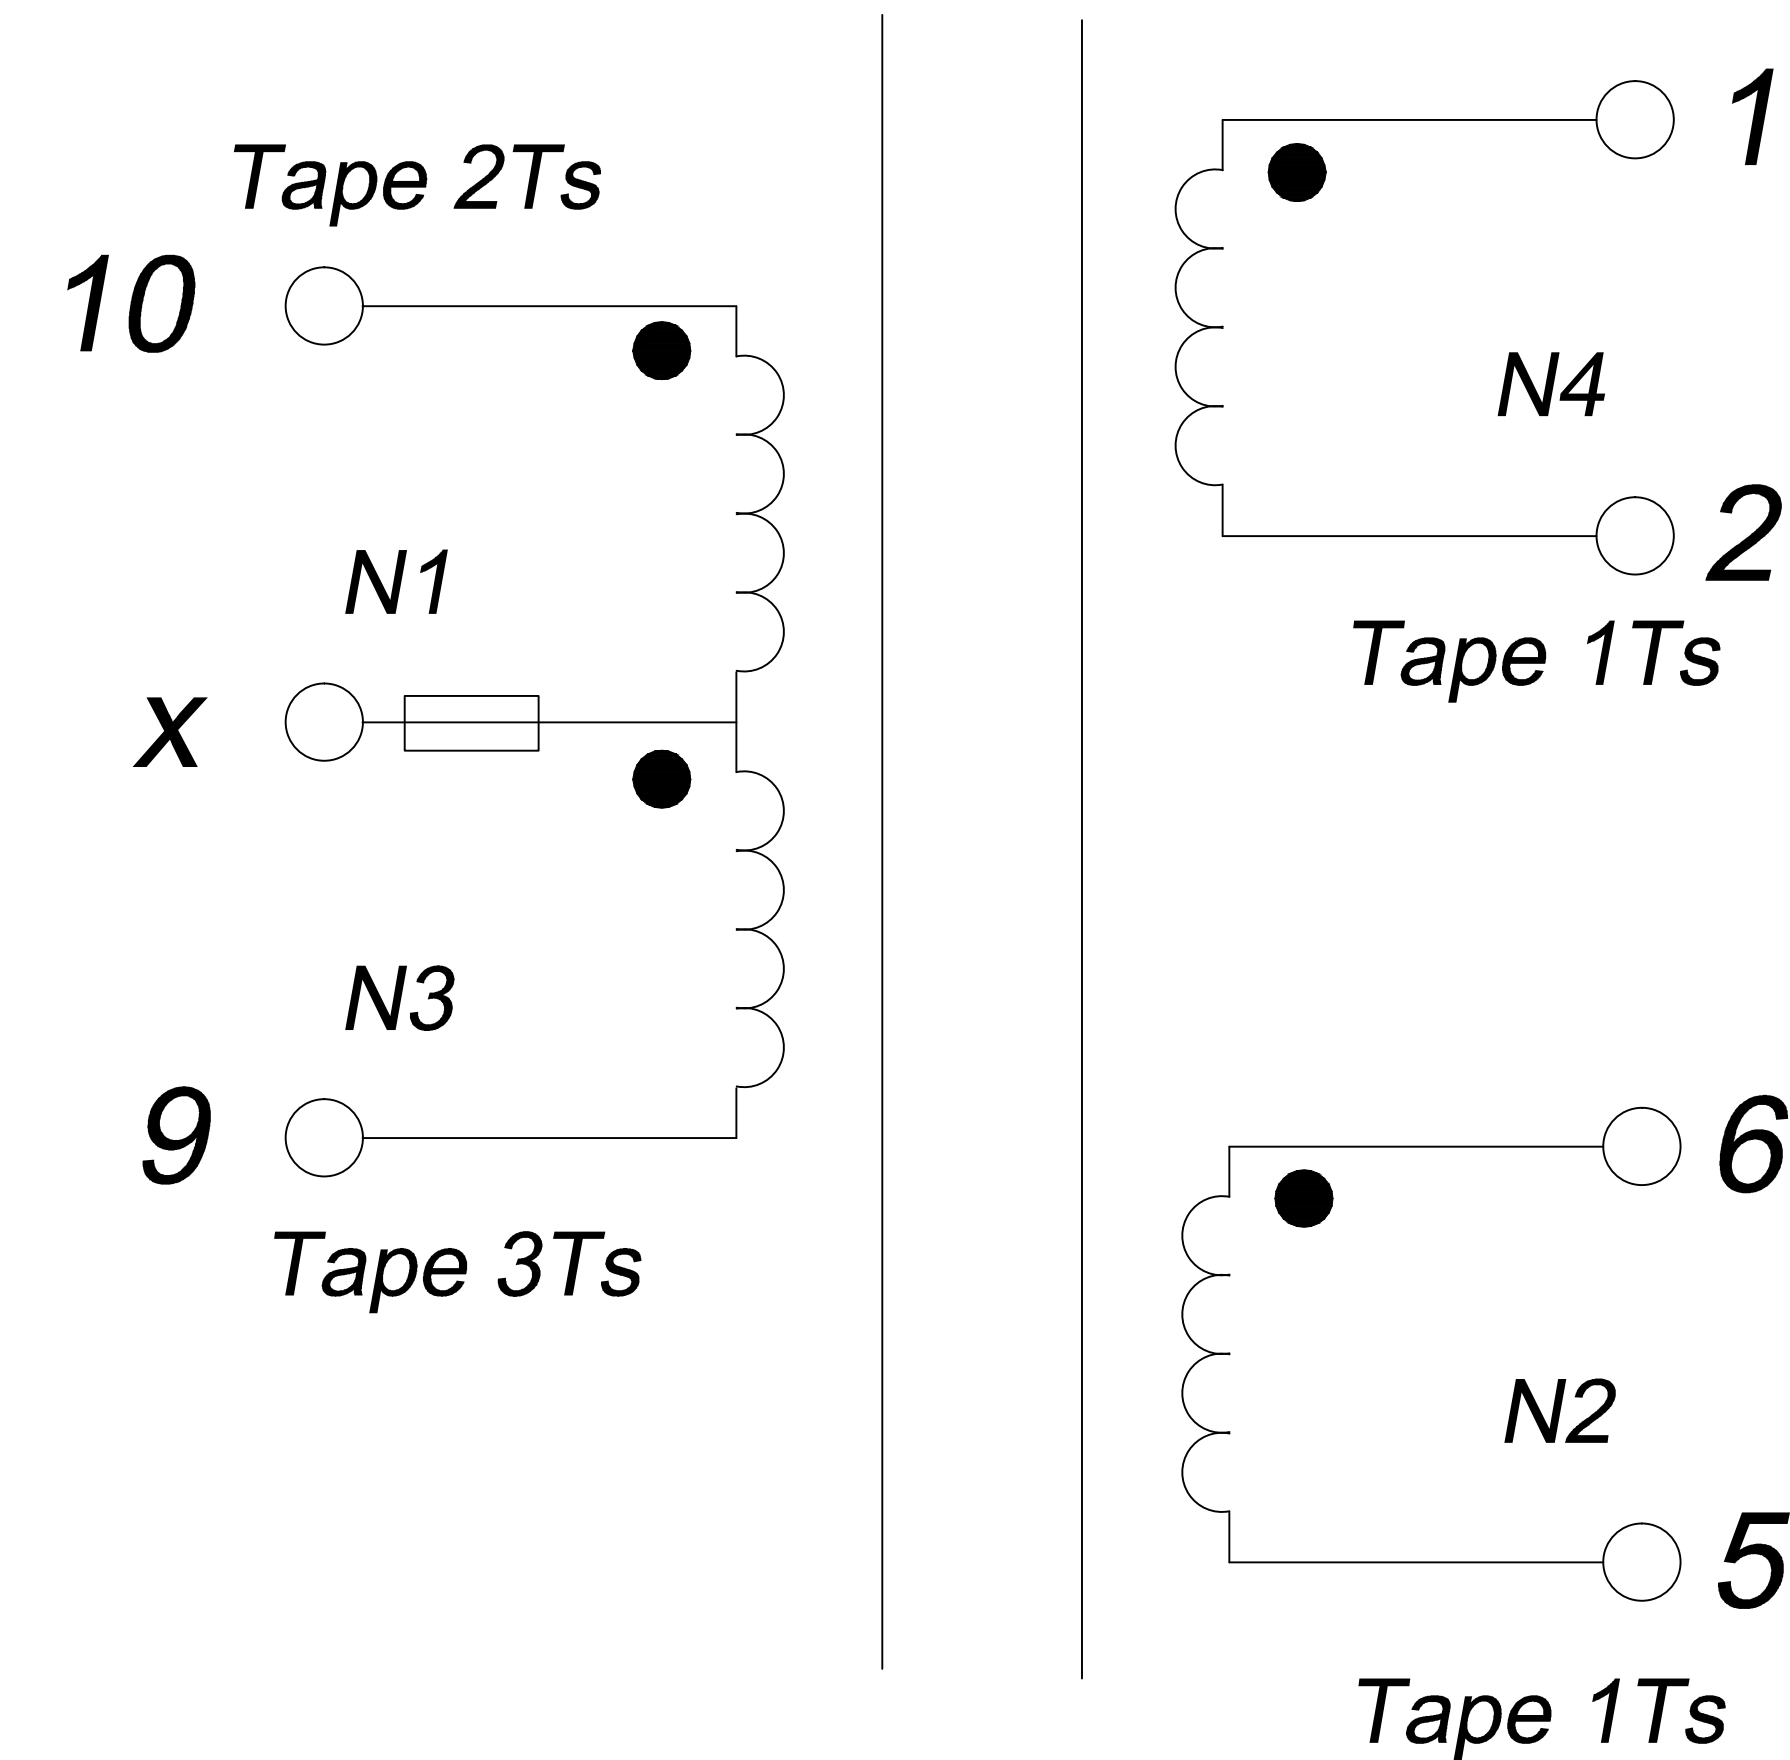

3. Material List

Core:FW44-EFD25/13/9

Bobbin:FWB2506(5+5)

Wire:2UEW-0.20/0.25/0.45mm 130°C

Tube:TFL tube

Operating Temperature: -30 to 115°C

4. Electrical Specification

Inductance: $L(10-9) = 2.3\text{mH} \pm 10\% 1.0\text{KHZ } 1.0\text{V}$

LK: $L(10-9) = 20\mu\text{H MAX } 100\text{KHZ}, 1.0\text{V}$ short other pins

HI-POT: Coil-Coil AC 1500V 3mA 2s

Coil-CORE AC 1500V 3mA 2s

REV.	DATE	<p>Convention Placement</p>	DRW.	Drawing Title: TRANSFORMER	Part No:
0	00/00		CHK.		Customer P/N:
		www.ferriwo.com	APP.		Specification Sheet 1 of 1