


CUSTOMER TERMINAL	ROHS	Lead (Pb) -free
	YES	YES

Autodesk




1. Mechanical Dimensions

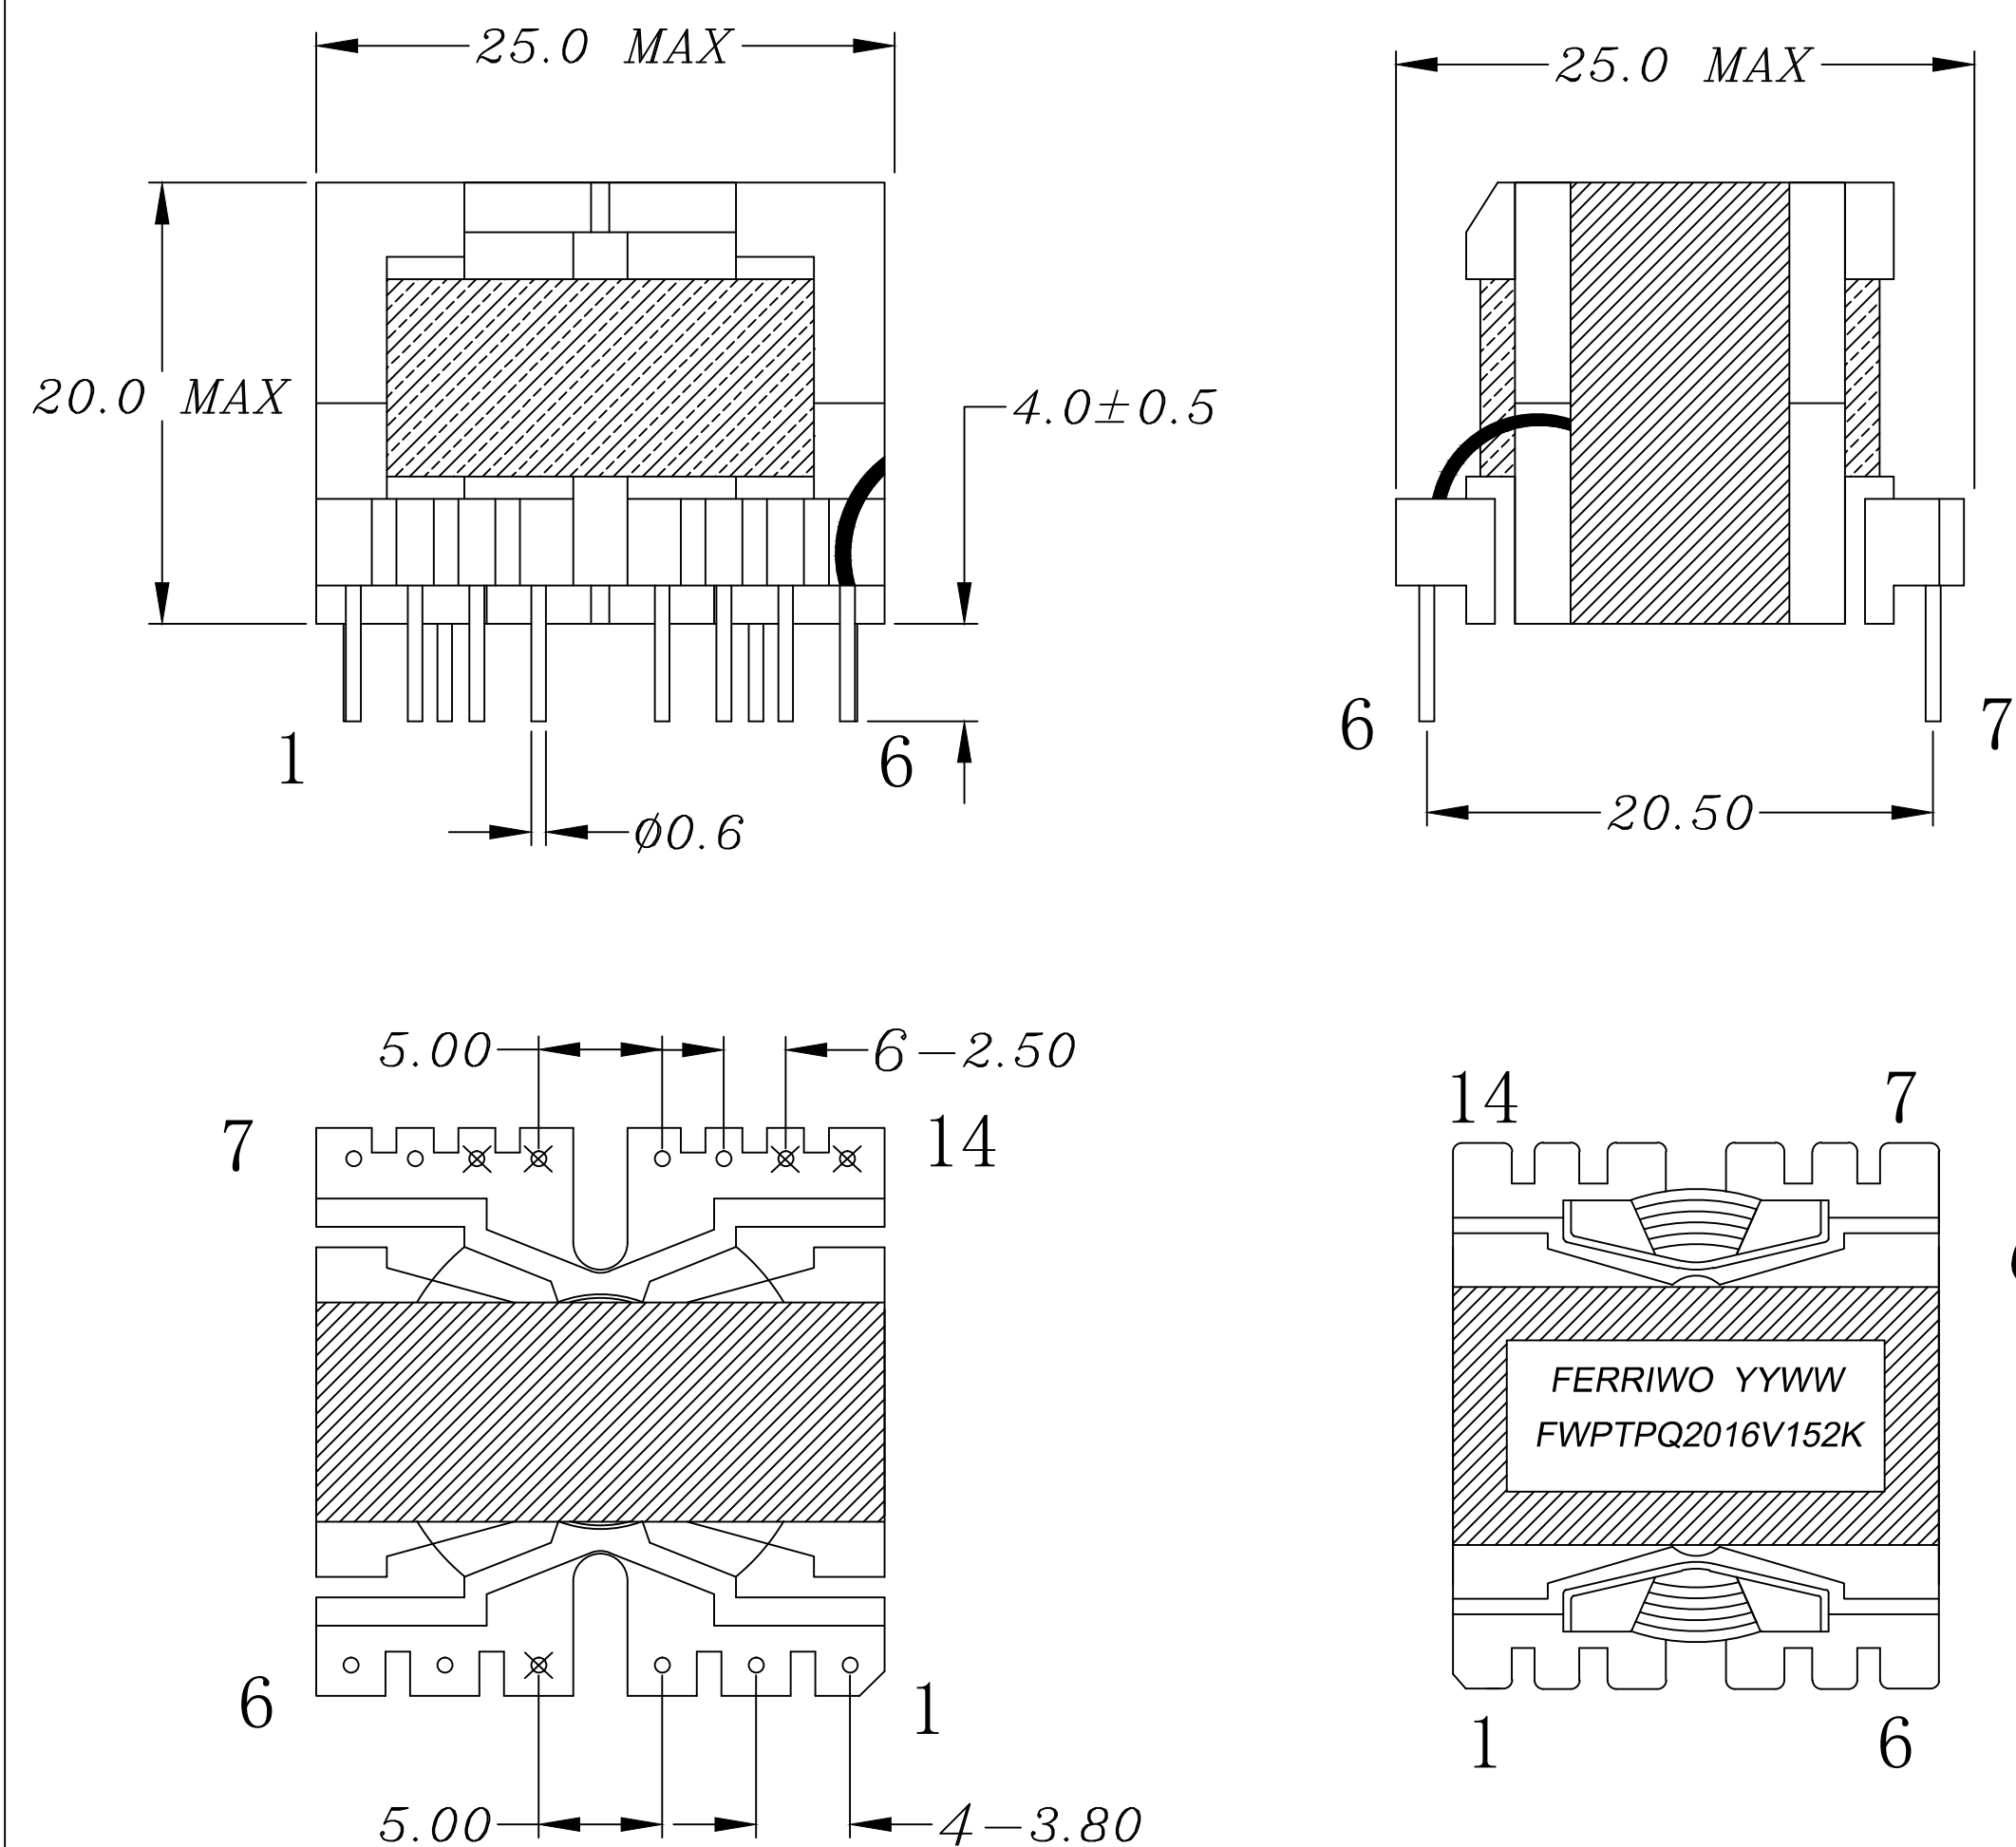

Note: PIN4,9,10,13,14 cut off
 PIN2 cut off 2/3
 Use 0.25mm copper wire connected to PIN6.

2. Schematic Diagram

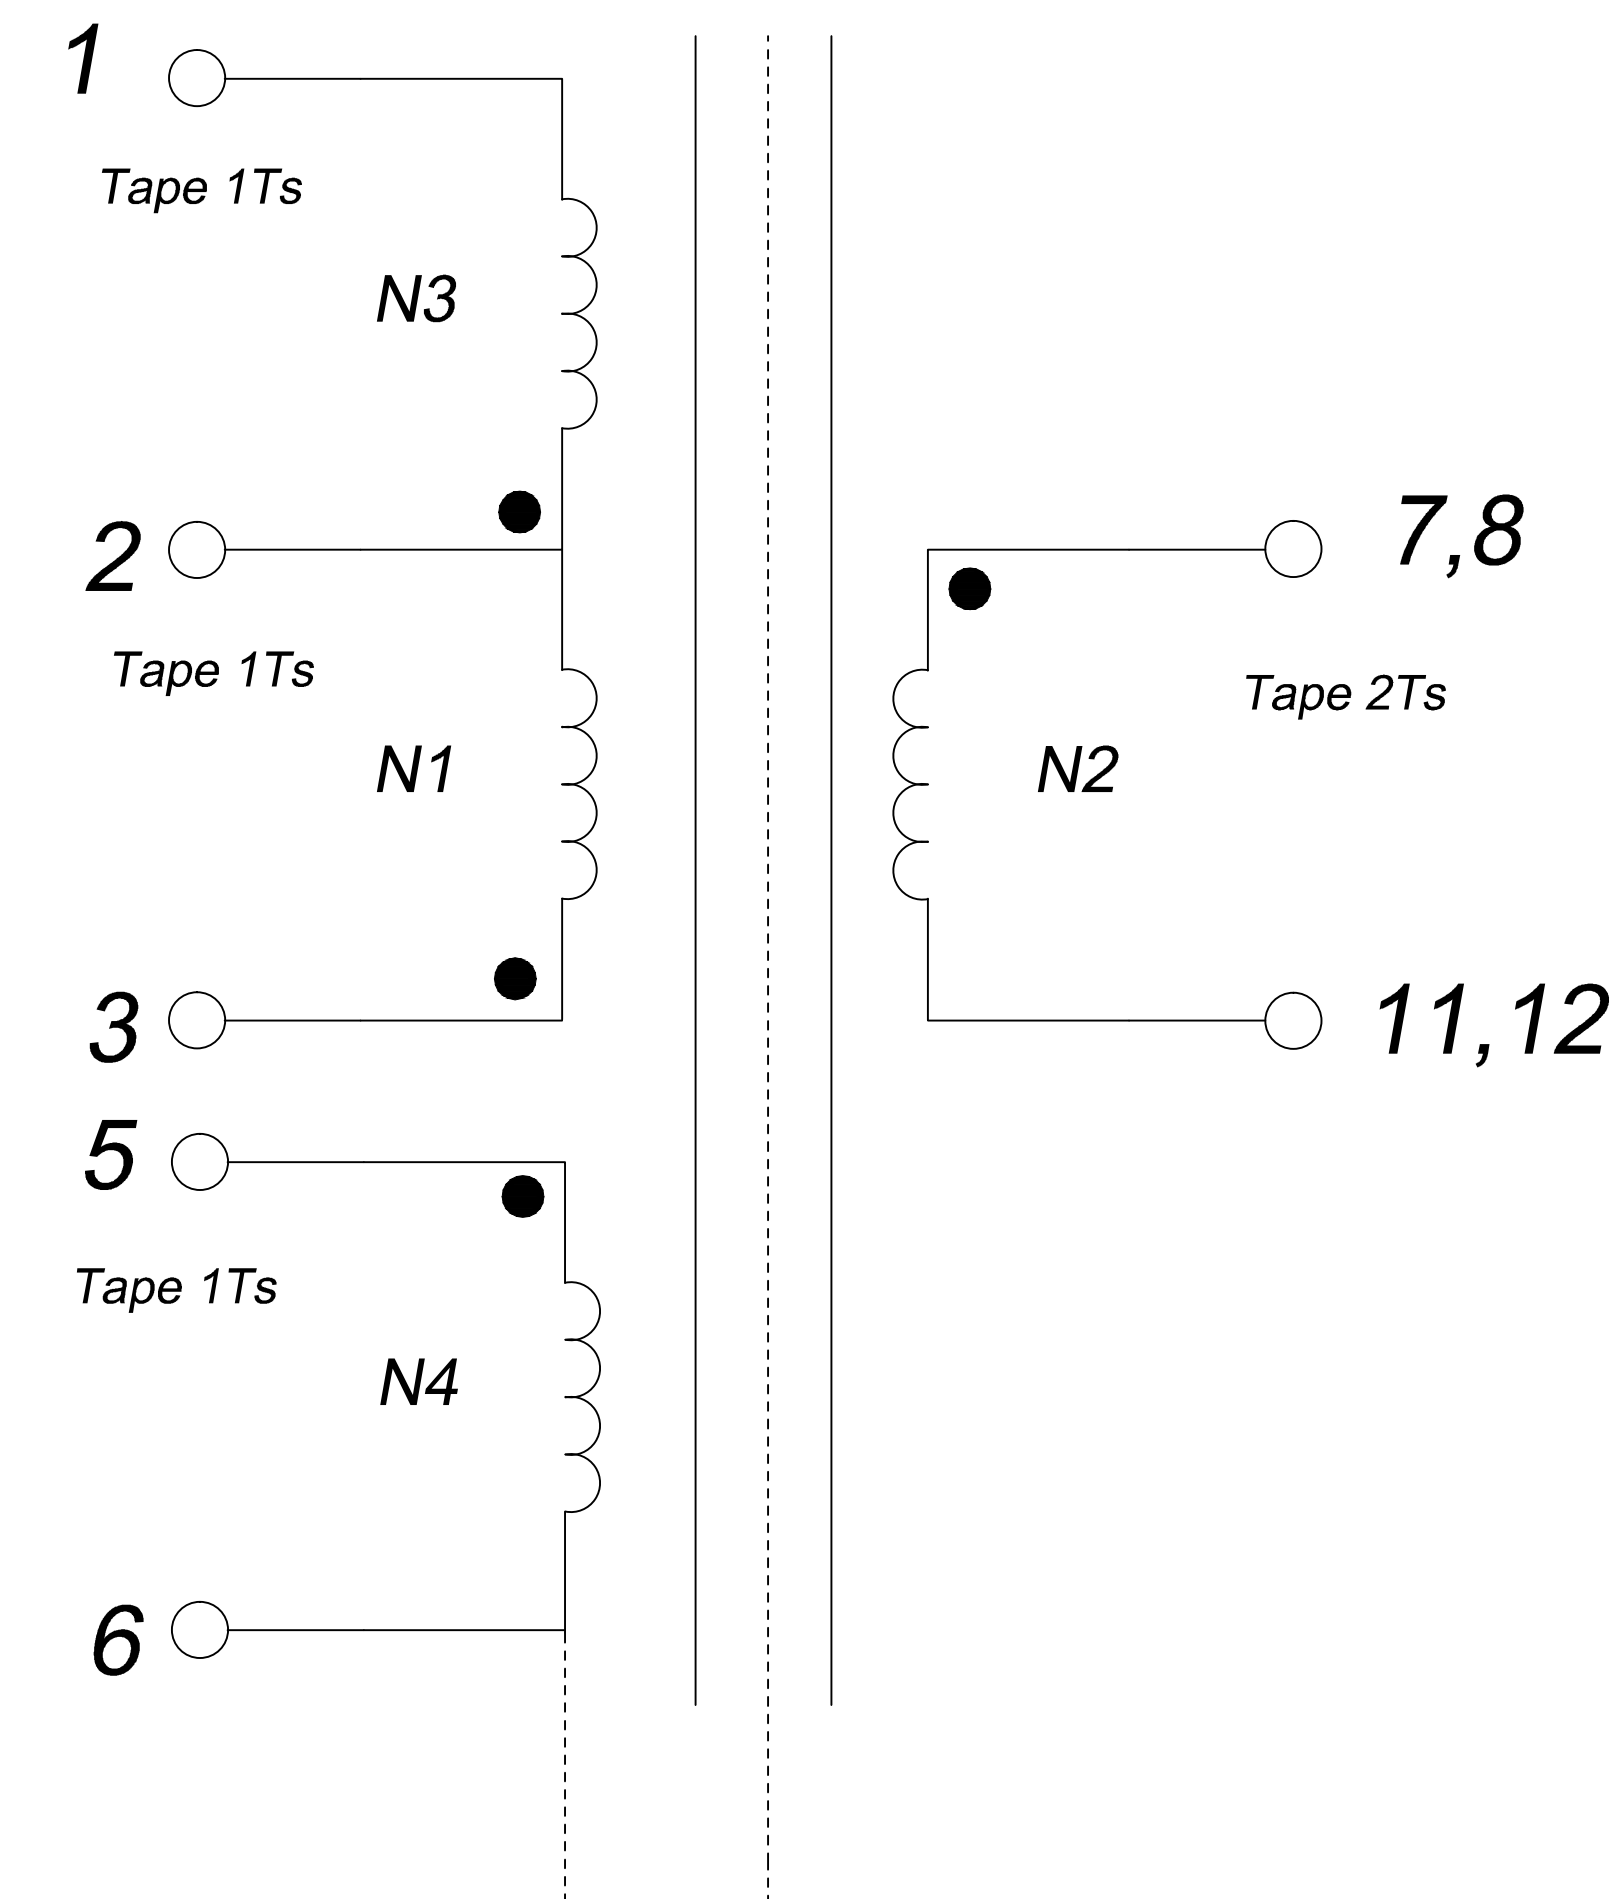

3. Material List

Core:FW40-PQ2016
 Bobbin:FWB2023(6+8PIN)
 Wire:2UEW-0.15/0.25mm TIW-B-0.37mm 130°C
 Tape: CT-280-25u
 Operating Temperature: -30 to 115°C

4. Electrical Specification

Inductance: L(1-3)=1550uH±10% 1.0KHZ 1.0V
 Hi-pot: P-S AC 2.5KV 3mA 3S
 S-CORE AC 2.5KV 3mA 3S

REV.	DATE	 Convention Placement	DRW.	Drawing Title: TRANSFORMER	Part No:
0	00/01		CHK.		Customer P/N:
RoHS		www.ferriwo.com	APP.		Specification Sheet 1 of 1