


CUSTOMER TERMINAL	ROHS	Lead (Pb) -free
	YES	YES

Autodesk



1. Mechanical Dimensions


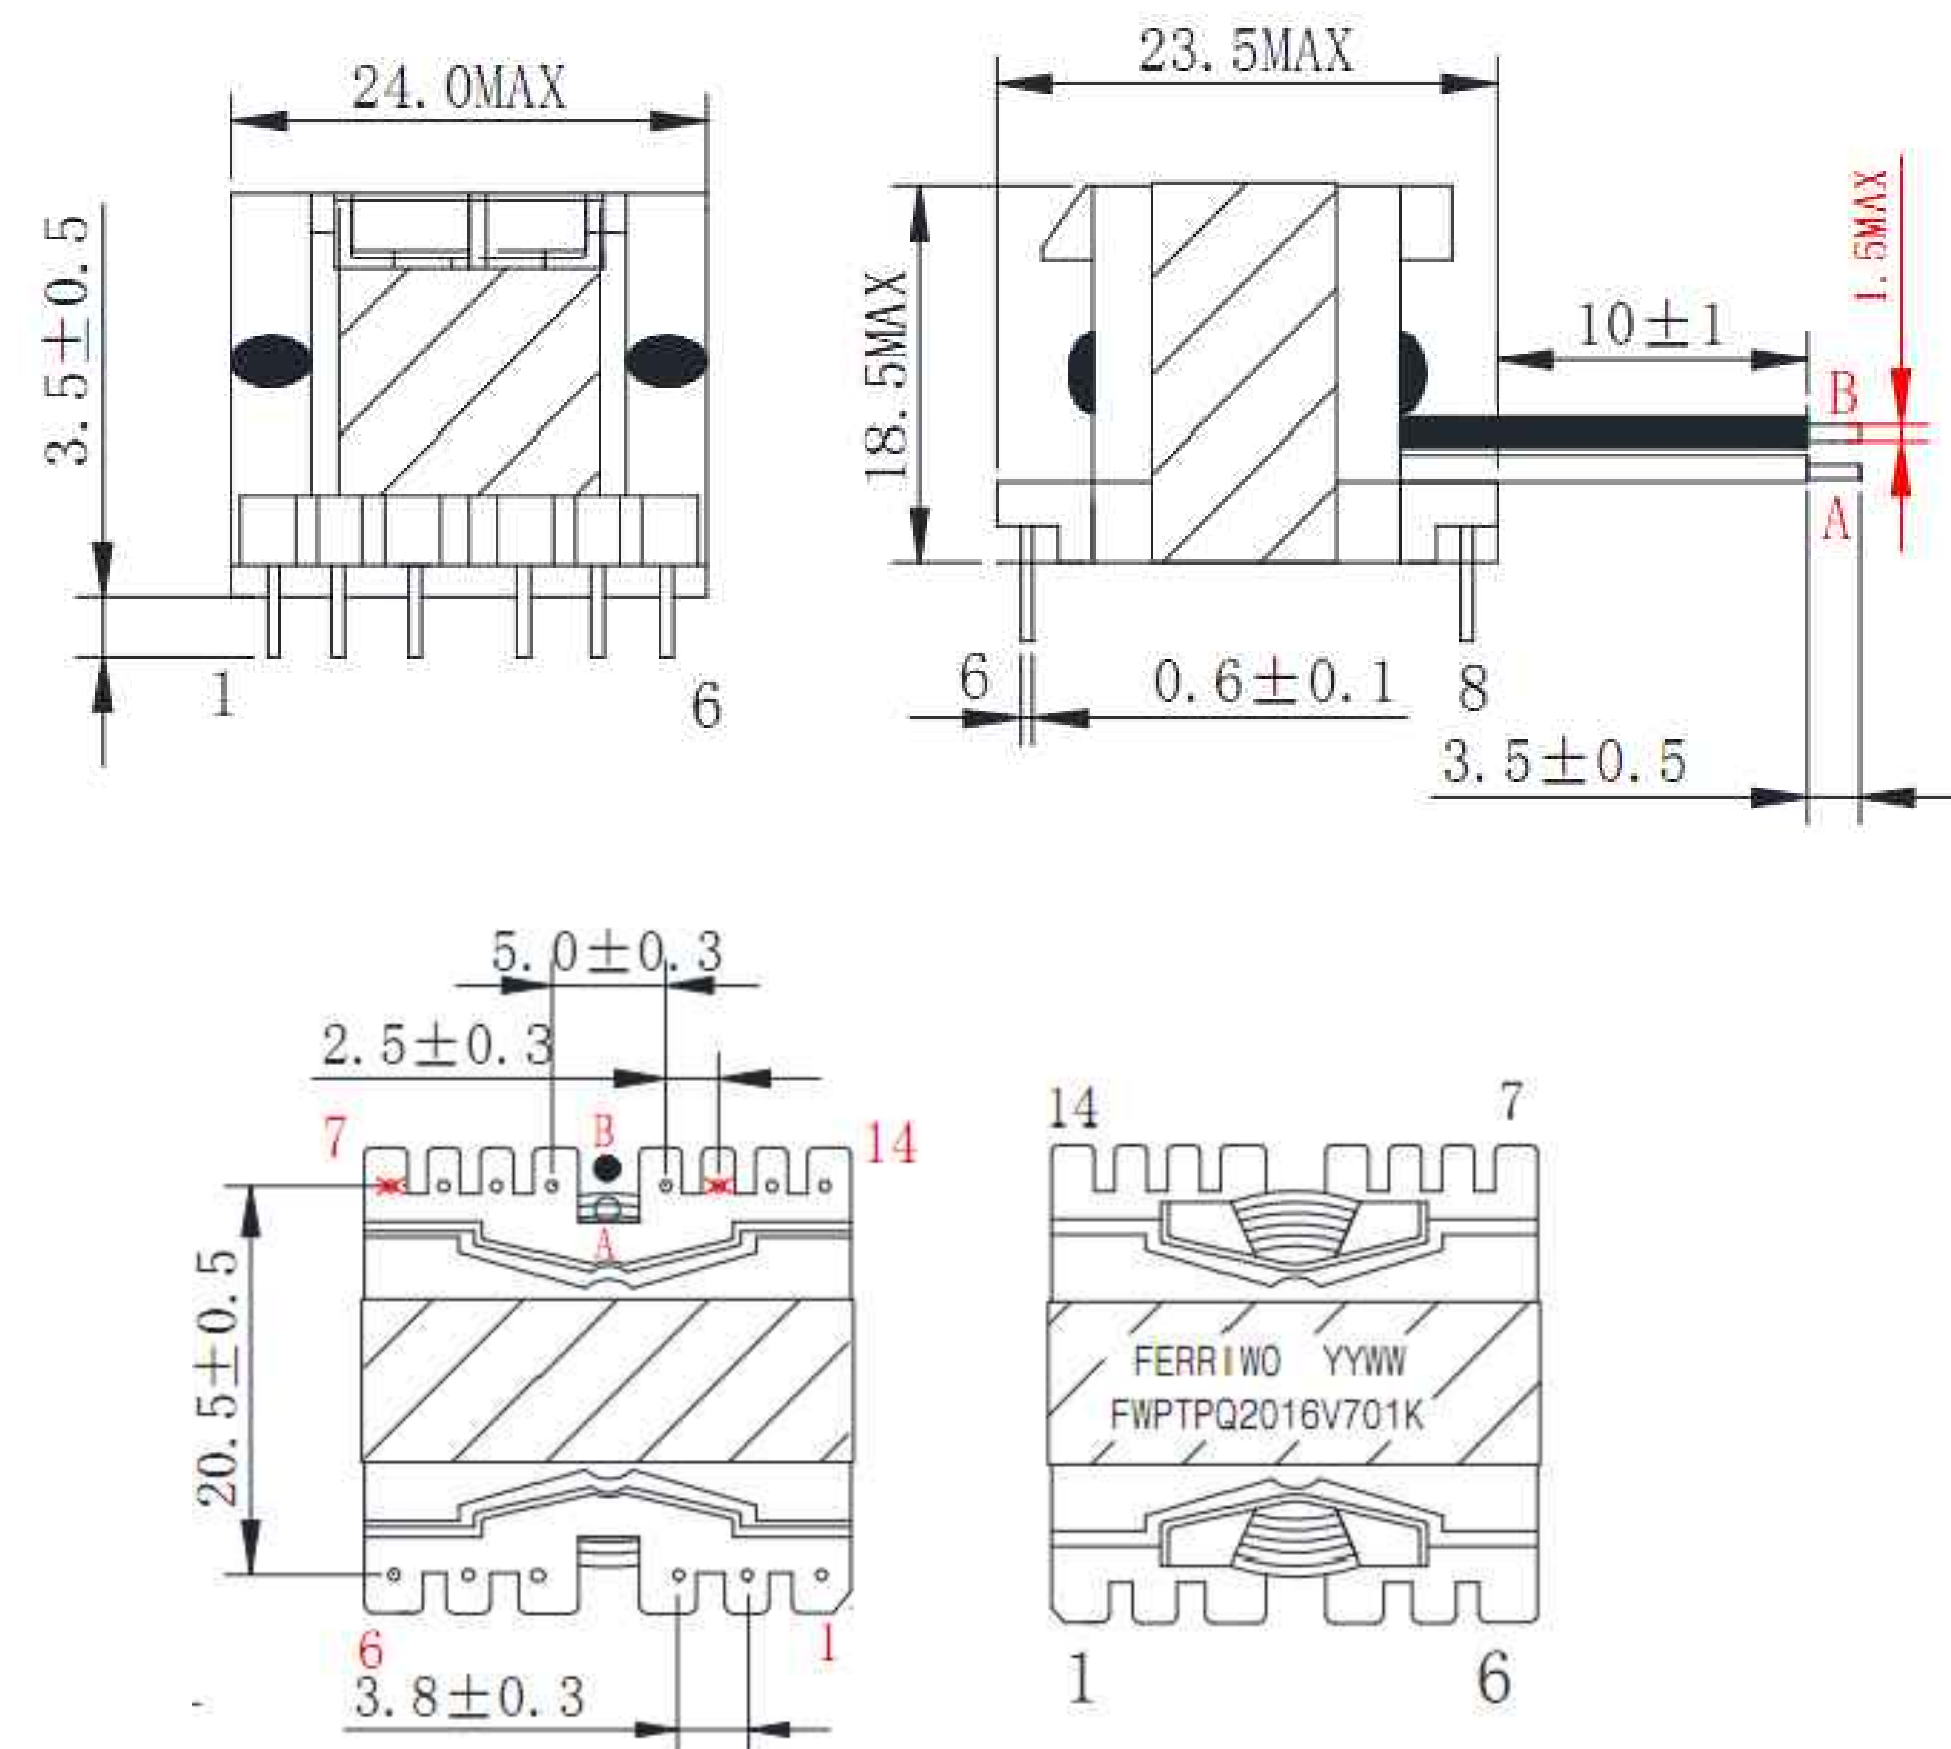


Note: PIN7,12 cut off

3. Material List

Core:FW40-PQ2016
 Bobbin:FWB2023(6+8PIN)
 Wire:2UEW-0.15/0.25mm TIW-B-0.40mm 130°C
 Copper foil: 0.05t*5.0mm
 Operating Temperature: -30 to 115°C

2. Schematic Diagram

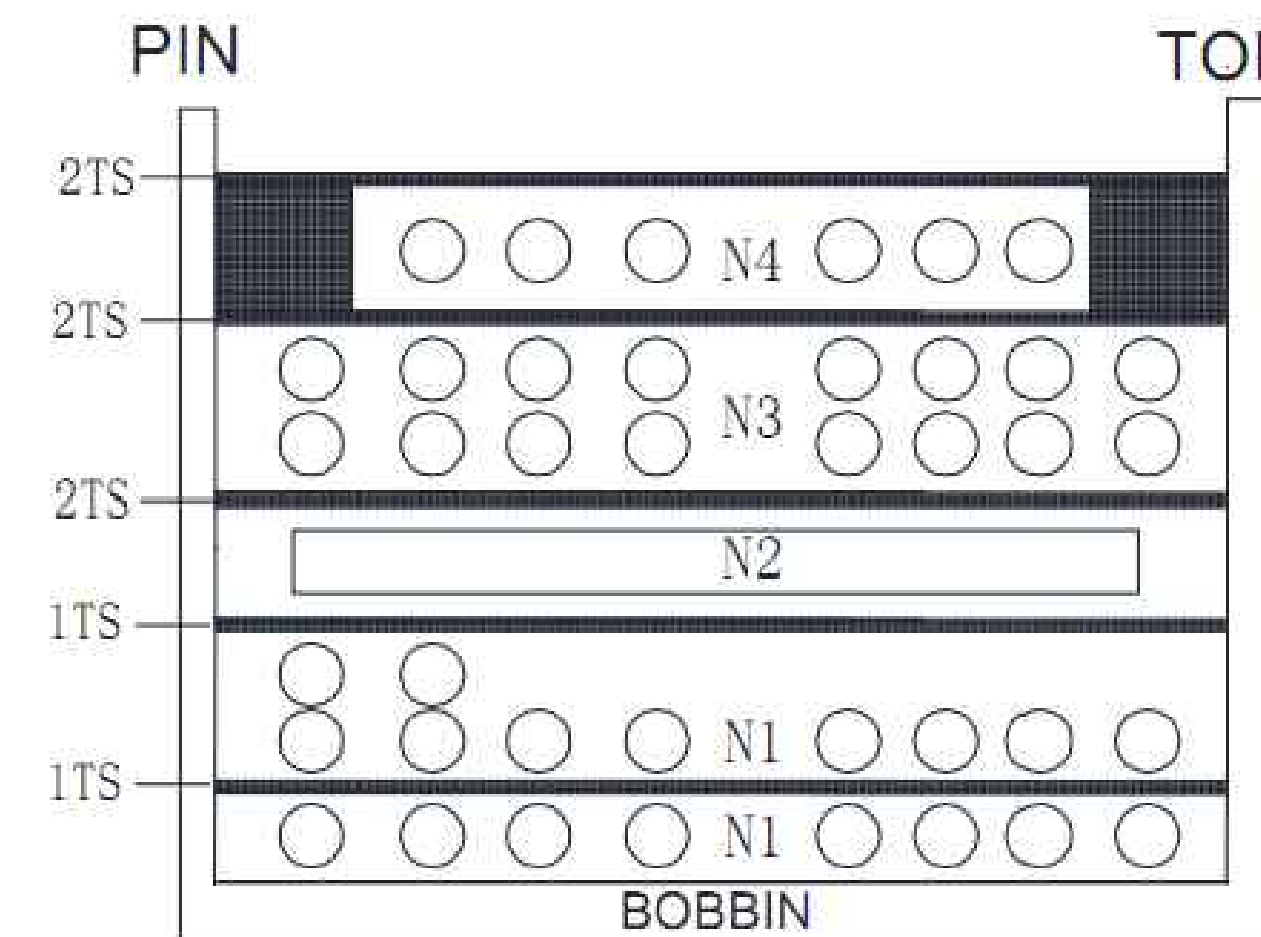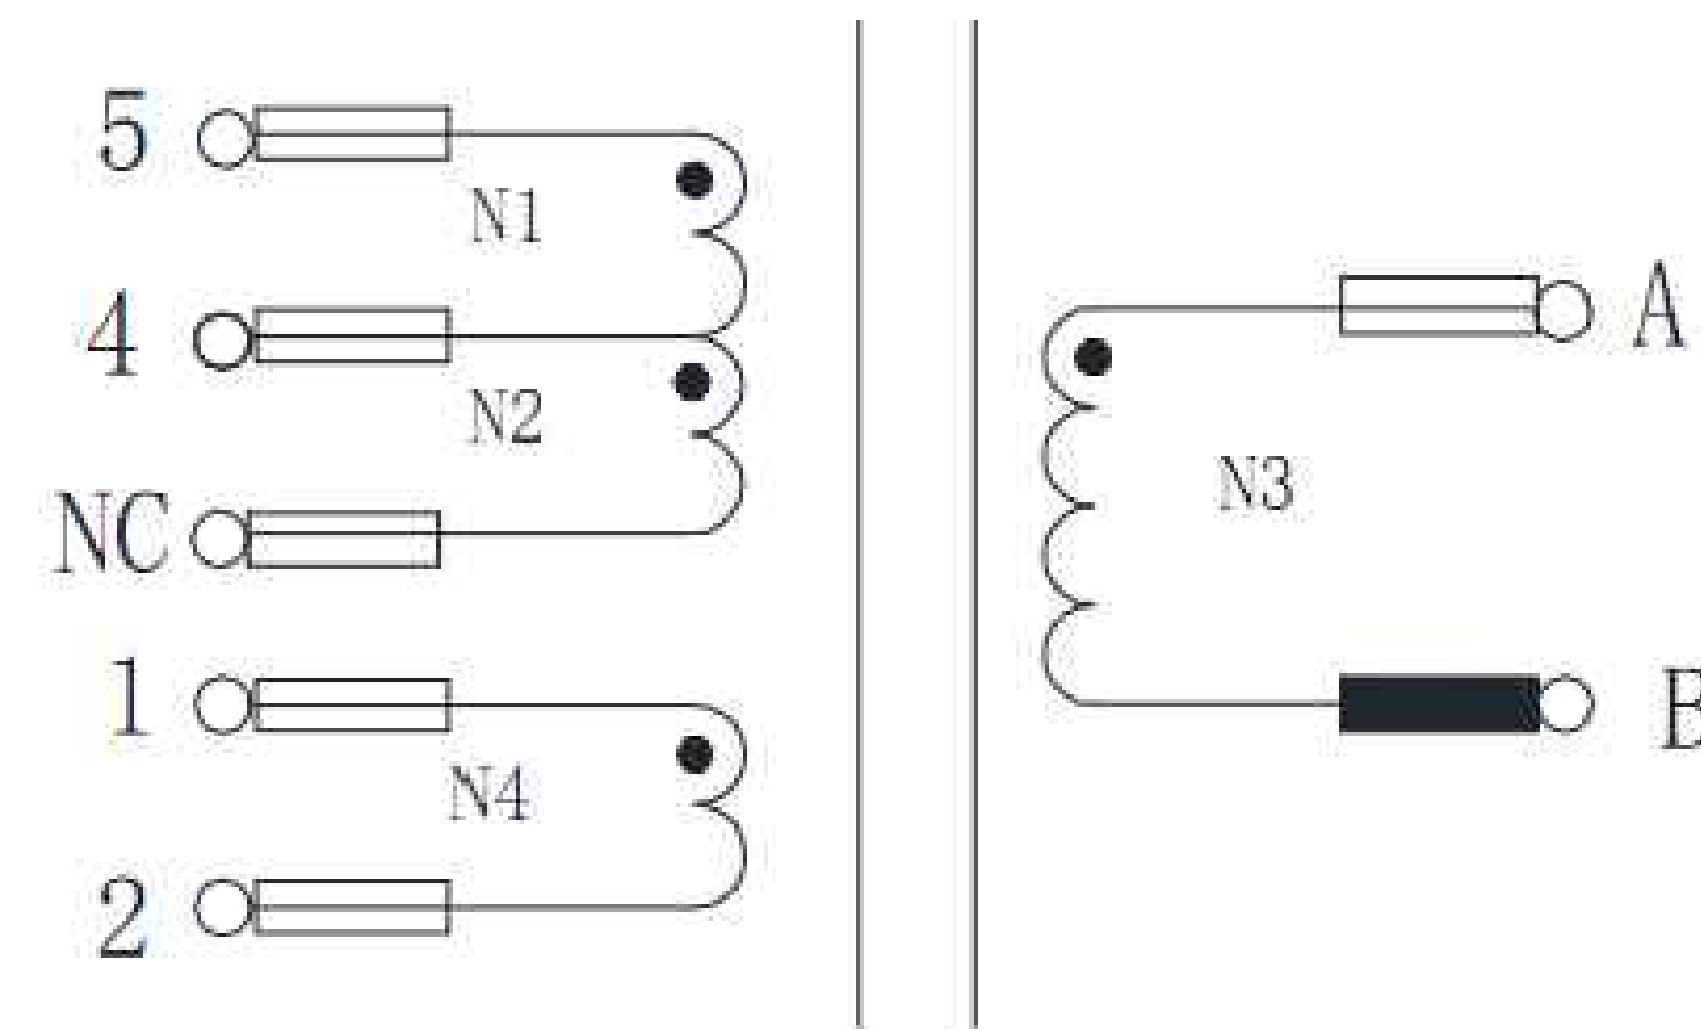

4. Electrical Specification

Inductance: $L(5-4)=700\mu H \pm 10\%$ 10.0KHZ 50mv
 LK: $L(5-4)=20.0\mu H$ MAX 100.0KHZ 50mv
 Hi-pot: P-S AC 4.0KV 3mA 2S
 PIN4-PIN1 AC 0.5KV 3mA 2S

REV.	DATE	<p>Convention Placement</p>	DRW.	Drawing Title: TRANSFORMER	Part No:
0	00/00		CHK.		Customer P/N:
RoHS		www.ferriwo.com	APP.	PQ2016	Specification Sheet 1 of 1