


CUSTOMER TERMINAL	ROHS	Lead (Pb) -free
	YES	YES


# FERRIWO

## 1. Mechanical Dimensions

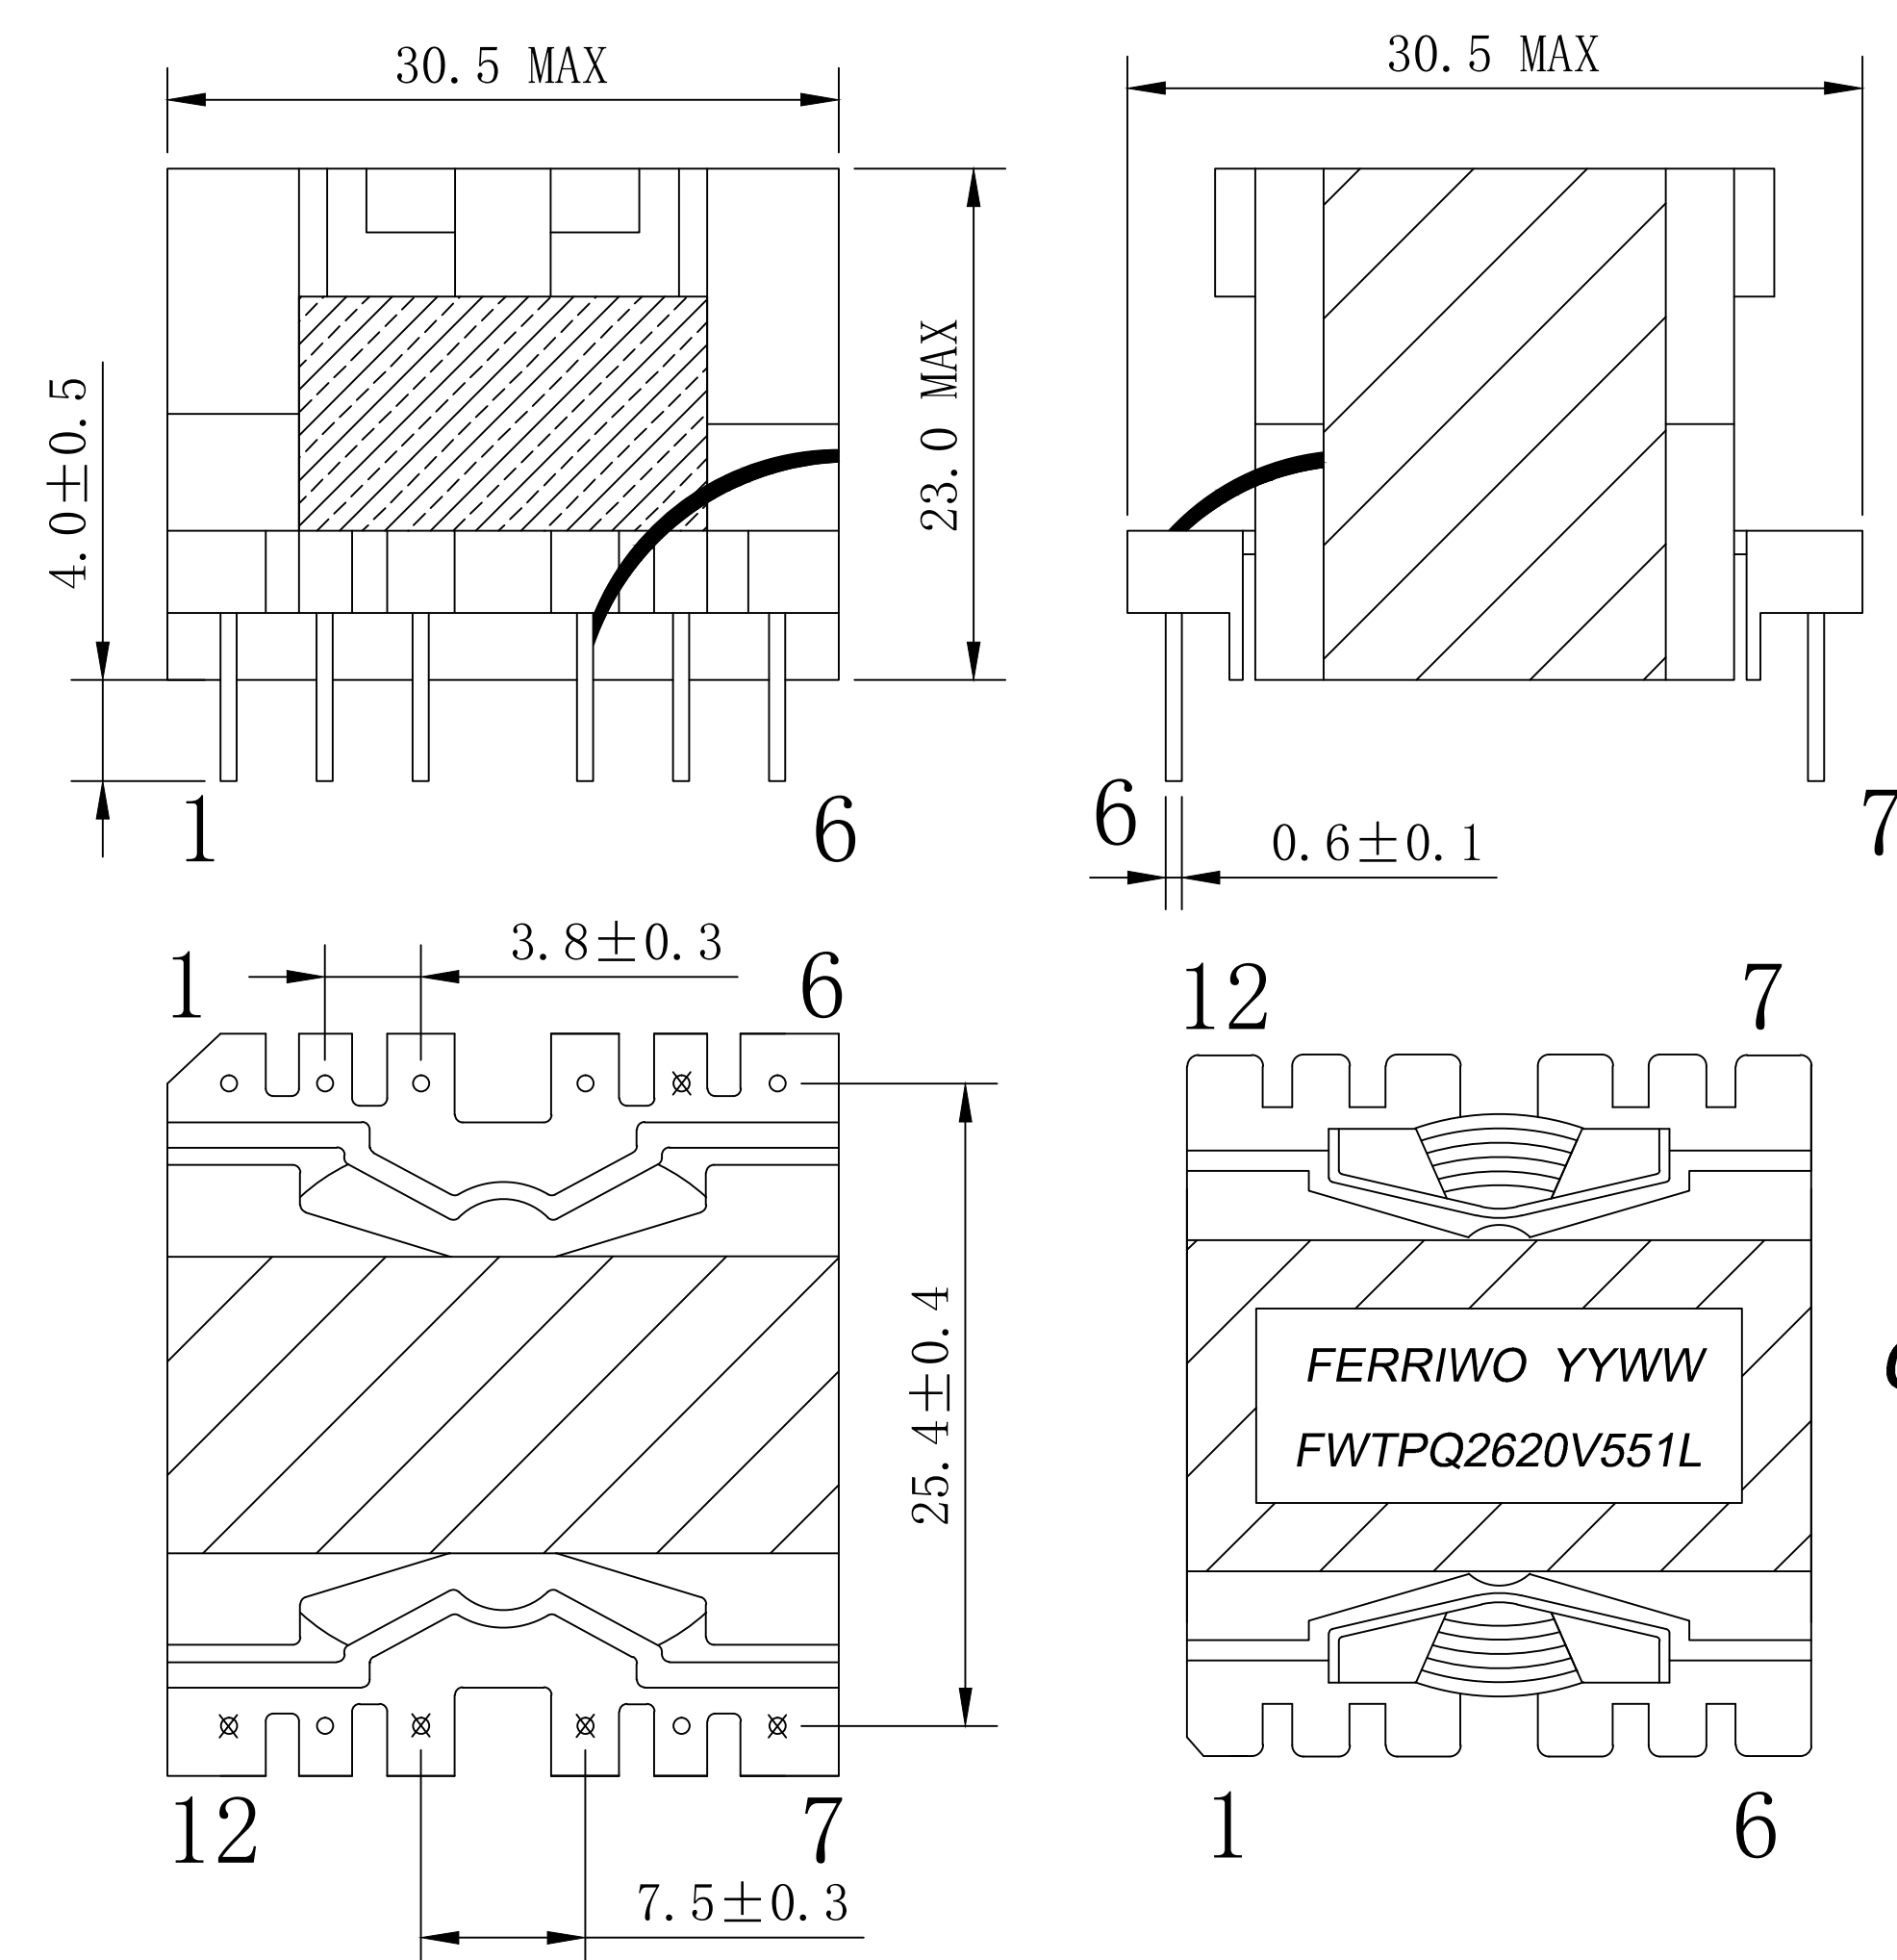

Note: PIN5,7,9,10,12  
cut off PIN2 cut off 2/3  
Use 0.4mm copper wire  
connected to PIN4.

## 2. Schematic Diagram

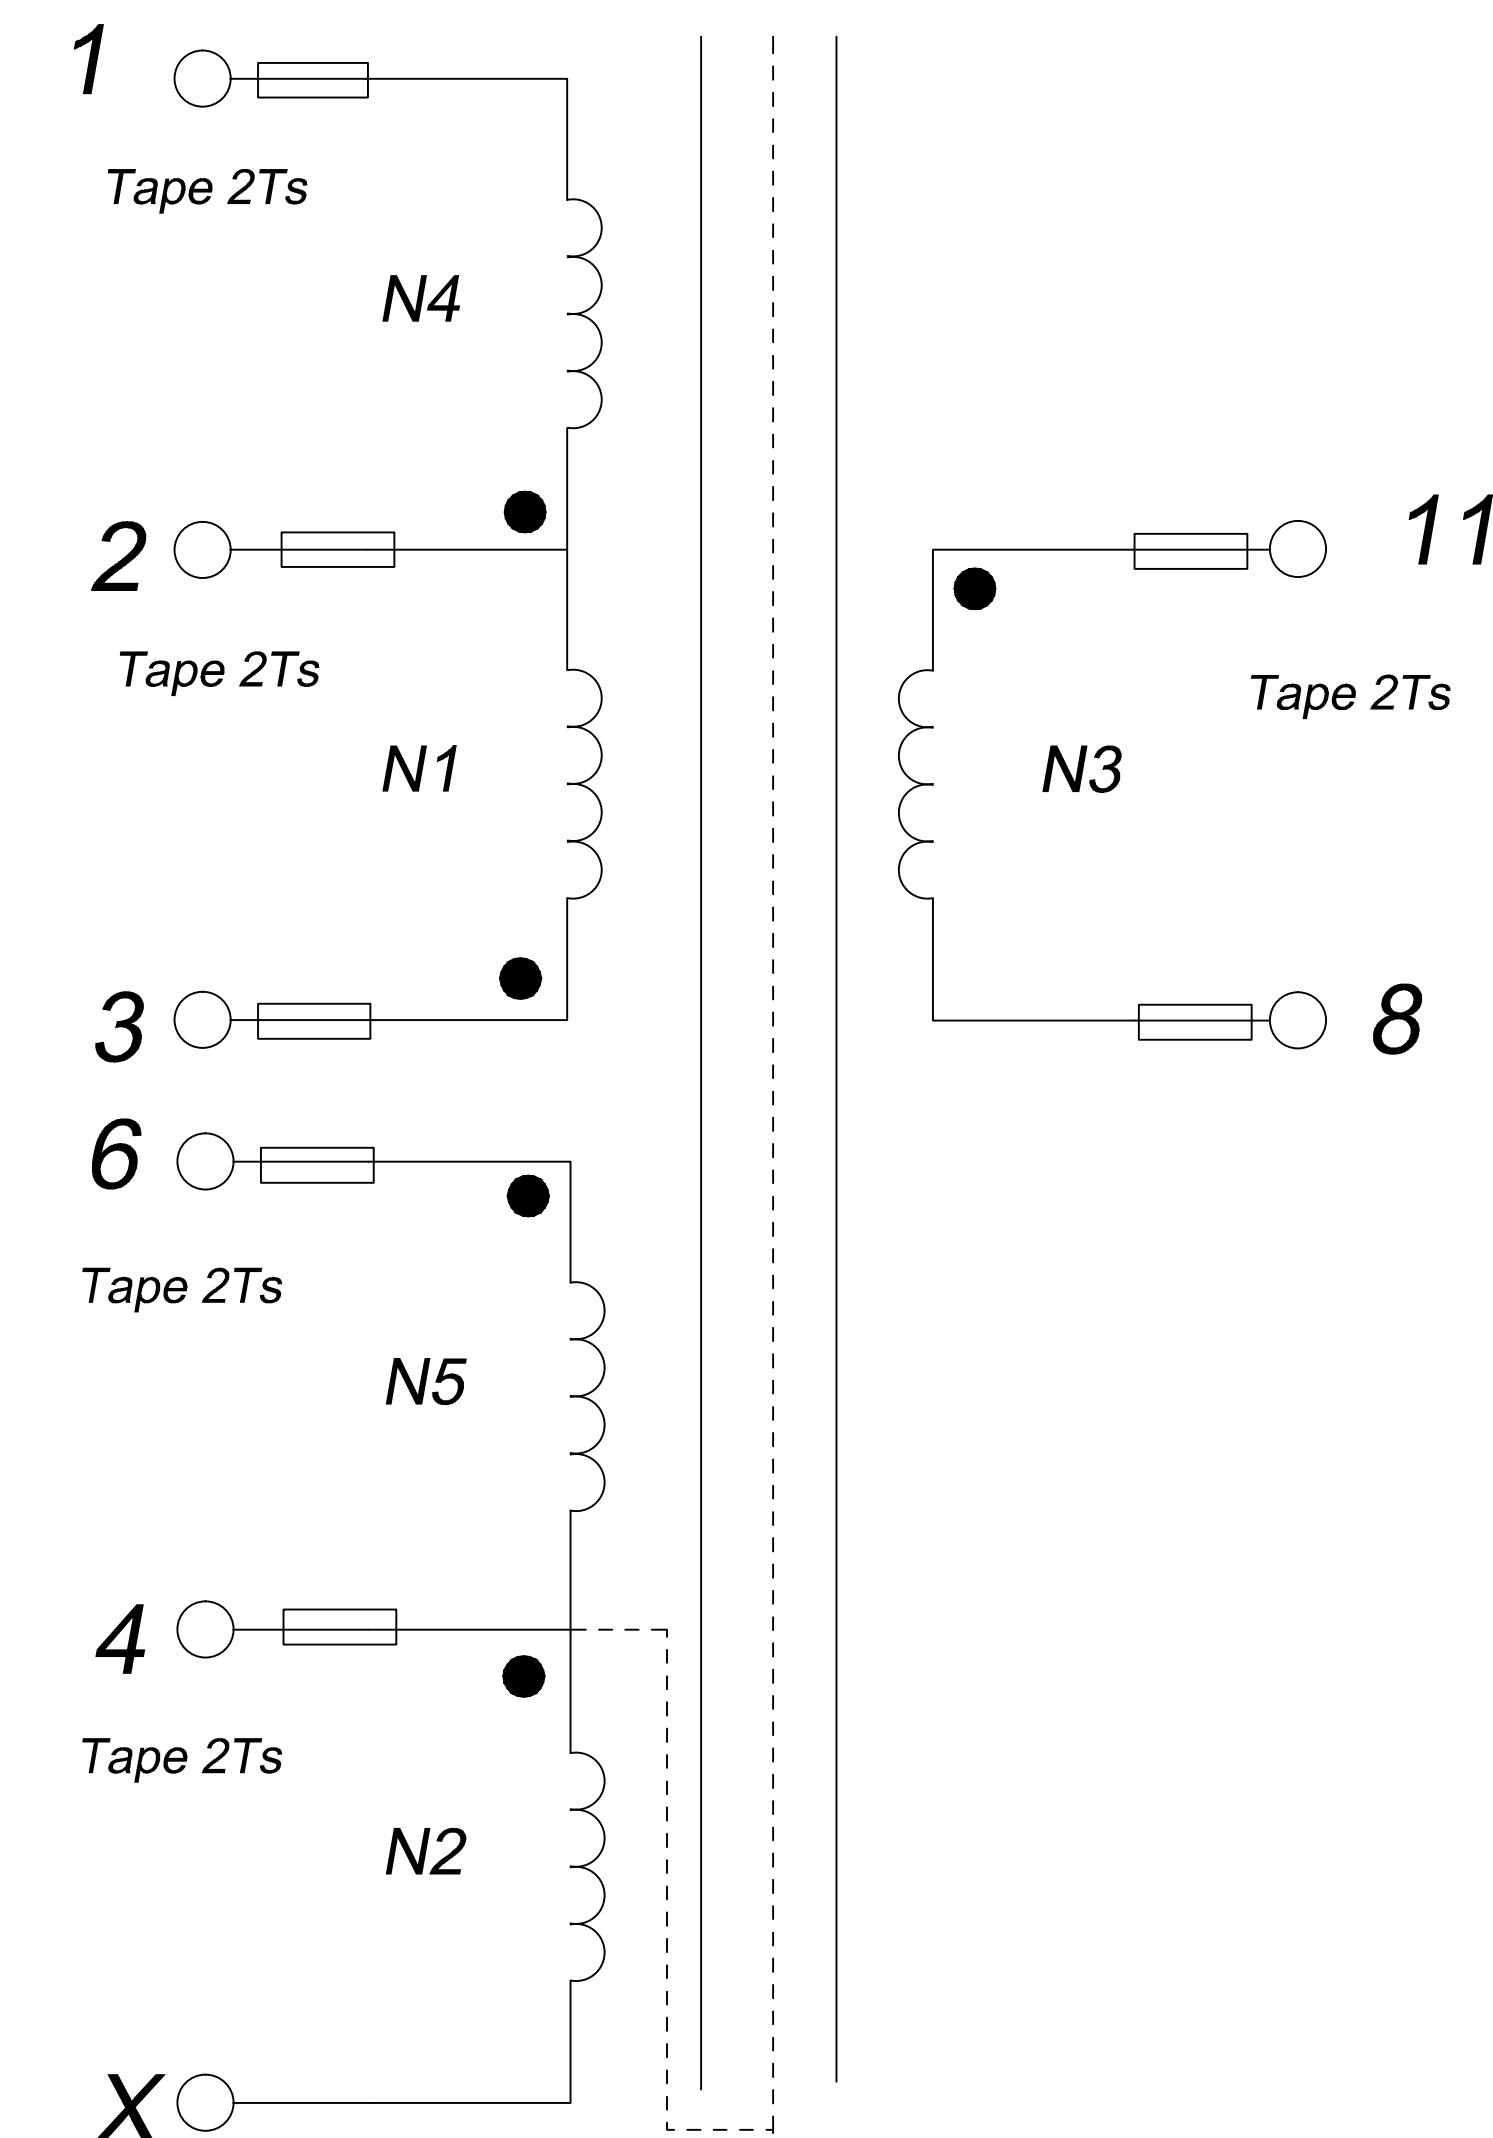

## 3. Material List

Core:FW40-PQ2620

Bobbin:FWB2601(6+6PIN)

Wire:2UEW-0.12/0.15/0.40mm TIW-B-0.45mm 130°C

Tube: TFL tube


Operating Temperature: -30 to 115°C

## 4. Electrical Specification

Inductance:  $L(1-3)=550\mu\text{H}\pm 15\%$  1.0KHZ 1.0V

Hi-pot: P-S AC 2.5KV 3mA 3S

S-CORE AC 2.5KV 3mA 3S

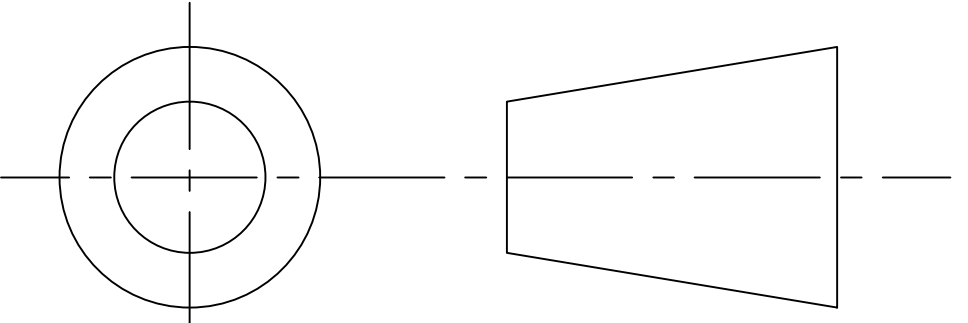REV.	DATE	 Convention Placement	DRW.	Drawing Title:	Part No:
0	00/01		CHK.		
RoHS		www.ferriwo.com	APP.	Customer P/N:	Specification Sheet 1 of 1