




CUSTOMER TERMINAL	ROHS	Lead (Pb) -free
	YES	YES

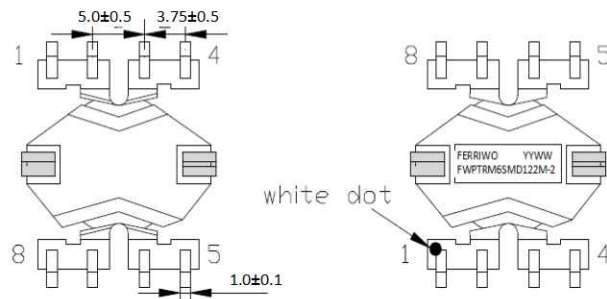

1. Mechanical Dimensions

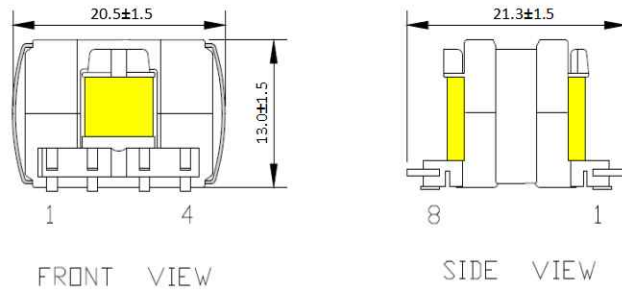

2. Schematic Diagram

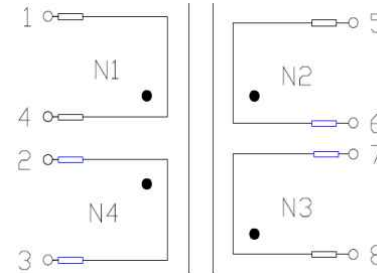

3. Material List

Core:FW40-RM6
 Bobbin:FWB0632-P
 Wire:2UEW-0.20/0.32mm 130°C
 Tape:WF-2901-1.0mm CT-280-25u-6.5mm
 Operating Temperature: -30 to 115°C

4. Electrical Specification

Inductance: $L(4-1)=1.2\text{mH}\pm 20\%$ 1.0KHZ 1.0V
 DCR: $(4-1)=1.0\Omega$ MAX.
 Hi-pot: N1-N2,N3 AC 3000V 5mA 10S
 N1-N4 AC 2500V 5mA 10S
 N2,N3-N4 AC 1500V 5mA 10S

REV.	DATE	 Convention Placement	DRW.	Drawing Title: TRANSFORMER	Part No:
0	00/00		CHK.		Customer P/N:
RoHS		www.ferriwo.com	APP.		Specification Sheet 1 of 1