



CUSTOMER TERMINAL	ROHS	Lead(Pb)-free
	YES	YES

1.Mechanical Dimensions

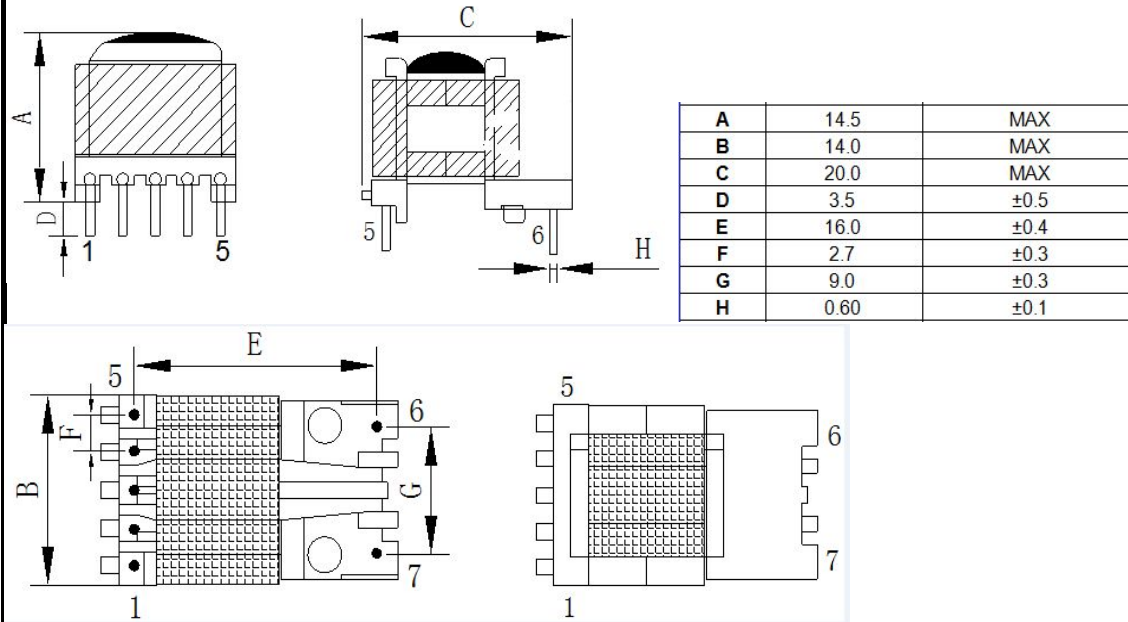

2.Schematic Diagram

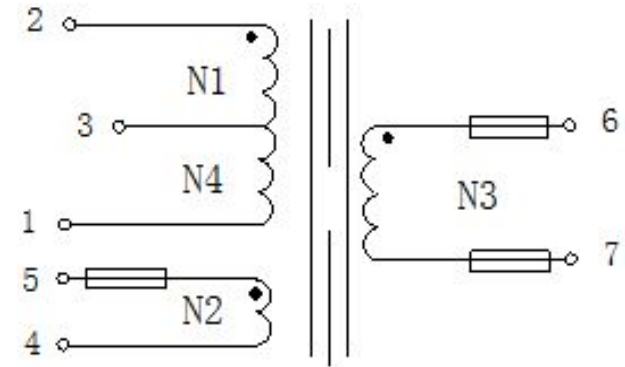

3.Material List

Core:FW40 EE13
 Bobbin:FWB1413(4+5PIN)
 Wire:2UEW TIW
 Operating Temperature: -30 to115 °C

4.Electrical Specification

Inductance:L(1-2):1.6mH±5% 100KHZ , 1V
 Leakage Inductance : 50uH MAX 100KHZ , 1V
 Hi-Pot:P-S: AC 60Hz 4000V 2mA 3S
 DCR:(1-2)=10Ω MAX

REV.	DATE	 Convention Placement	DRW.		Drawing Title:	Part No:
0	00/00		CHK.			
			APP.		Customer P/N	Specification Sheet 1of 1

ROHS

www.ferriwo.com