



CUSTOMER TERMINAL	ROHS	Lead(Pb)-free
	YES	YES



1.Mechanical Dimensions

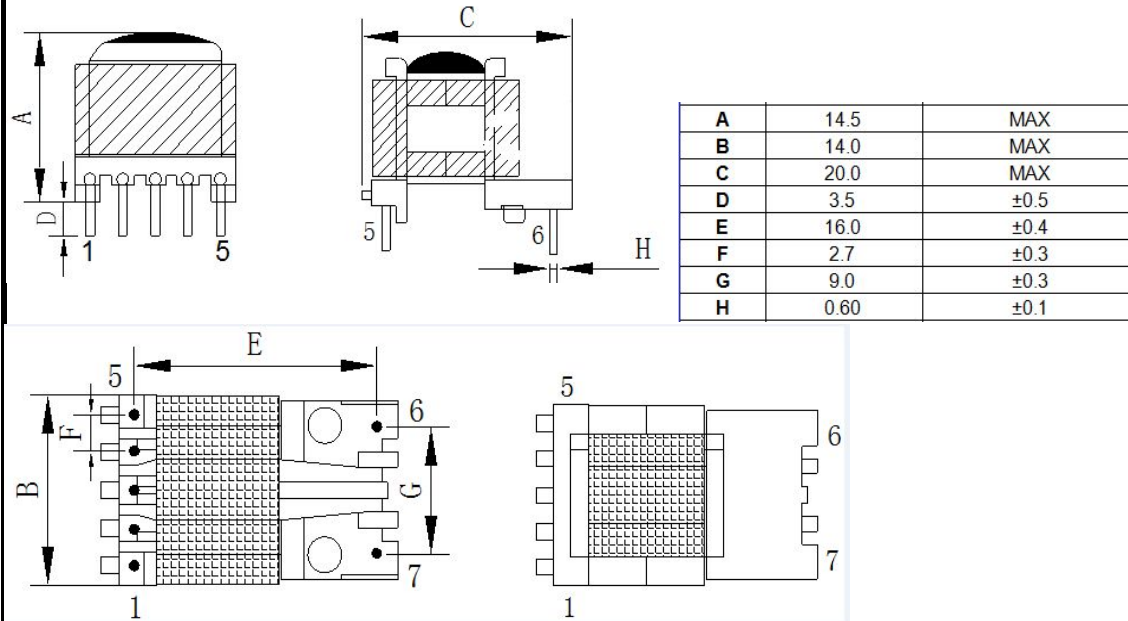

2.Schematic Diagram

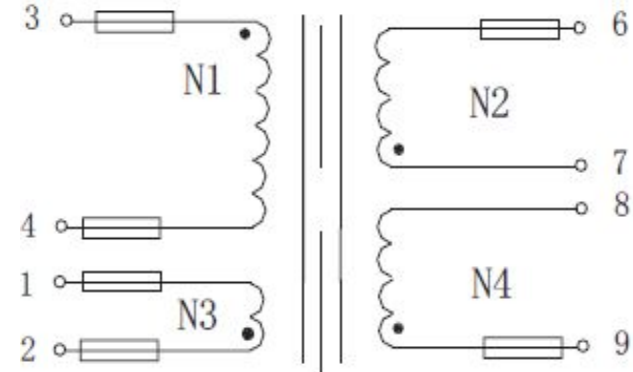

3.Material List

Core:FW40 EE13
 Bobbin:FWB1413(4+5PIN)
 Wire:2UEW TIW
 Operating Temperature: -30 to115 °C

4.Electrical Specification

Inductance:L(3-4):2.5mH±5% 60KHZ , 1V
 Leakage Inductance : 130uH MAX 60KHZ , 1V
 DCR:(3-4)=8.16Ω Max (6-7)=0.36Ω Max
 Hi-Pot:P-S: AC 60Hz 4000V 2.0mA 3S
 S-CORE:AC 60Hz 4000V 2.0mA 3S

REV.	DATE	 Convention Placement	DRW.	Drawing Title:	Part No:		
0	00/00		CHK.			TRANSFORMER	FWPTEE13H252J
			APP.			Customer P/N	Specification Sheet 1of 1

ROHS

www.ferriwo.com