


CUSTOMER TERMINAL	ROHS	Lead(Pb)-free
	YES	YES

1. Mechanical Dimensions

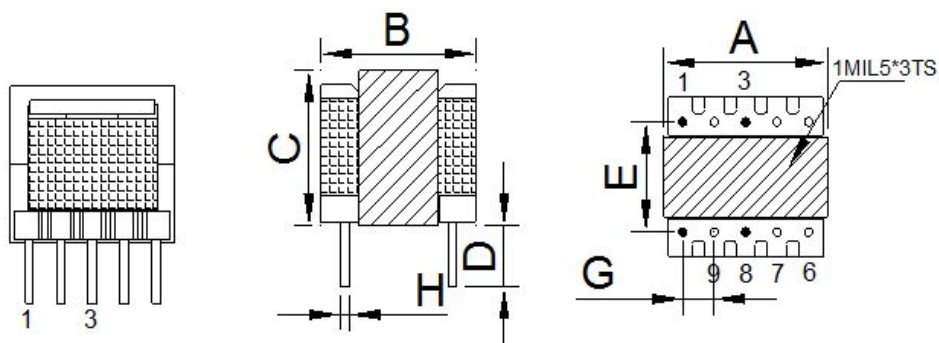

A	13.8	MAX
B	14.0	MAX
C	15.0	MAX
D	3.0	±0.5
E	8.5	±0.4
G	2.5	±0.3
H	0.60	±0.1

3. Material List


Core:FW44 EE13/12/6

Bobbin:FWB1302(5+5PIN)

Wire:2UEW

Operating Temperature: -30 to115 °C

2. Schematic Diagram

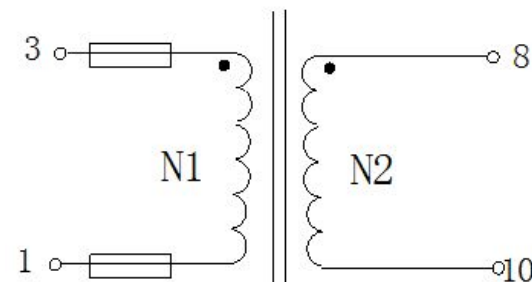

4. Electrical Specification

Inductance:L(3-1):500uH±5% 100KHZ 、 1.0V

DCR : (3-1)=1.3Ω MAX

Hi-Pot:P-S: AC 60Hz 600V 1mA 3S

REV.	DATE	<p>Convention Placement</p>	DRW.		Drawing Title:	Part No:
0	00/00		CHK.			
ROHS			www.ferriwo.com	APP.		Customer P/N