



CUSTOMER TERMINAL	ROHS	Lead(Pb)-free
	YES	YES

1. Mechanical Dimensions

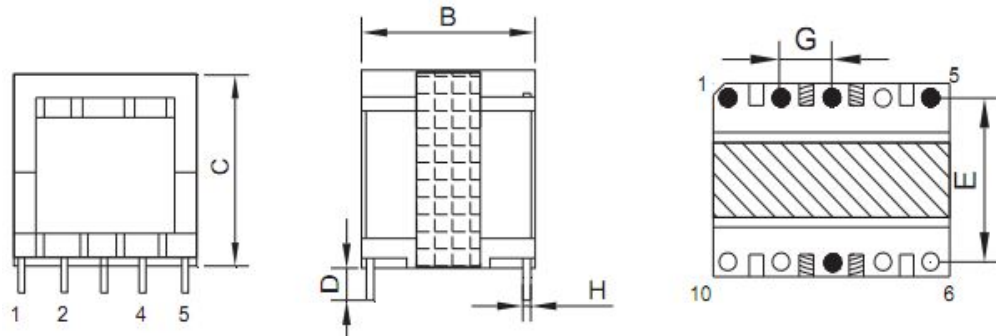

A	17.00	MAX
B	14.00	MAX
C	15.50	MAX
D	3.50	±0.5
E	10.50	±0.4
G	3.25	±0.2
H	0.60	±0.1

2. Schematic Diagram

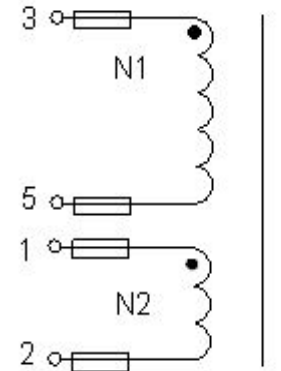

3. Material List

Core:FW44 EE16/15/5

Bobbin:FWB1601(5+5PIN)

Wire:2UEW

Operating Temperature: -30 to115 °C

4. Electrical Specification

Inductance : $L(3-5):1mH \pm 8\%$ 100KHZ , 1.0V

DCR : $(3-5)=0.98\Omega$ MAX

Hi-Pot:N1-N2-CORE: AC 60Hz 500V 2mA 3S

REV.	DATE	<p>Convention Placement</p>	DRW.		Drawing Title:	Part No:
0	00/00		CHK.			
ROHS			www.ferriwo.com	APP.		Customer P/N