



CUSTOMER TERMINAL	ROHS	Lead (Pb) -free
	YES	YES



### 1. Mechanical Dimensions

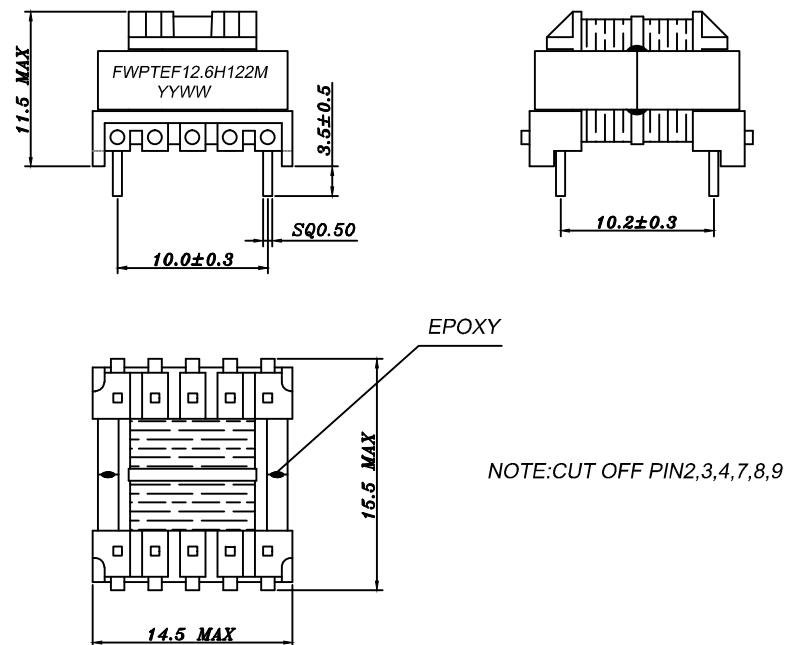

### 2. Schematic Diagram

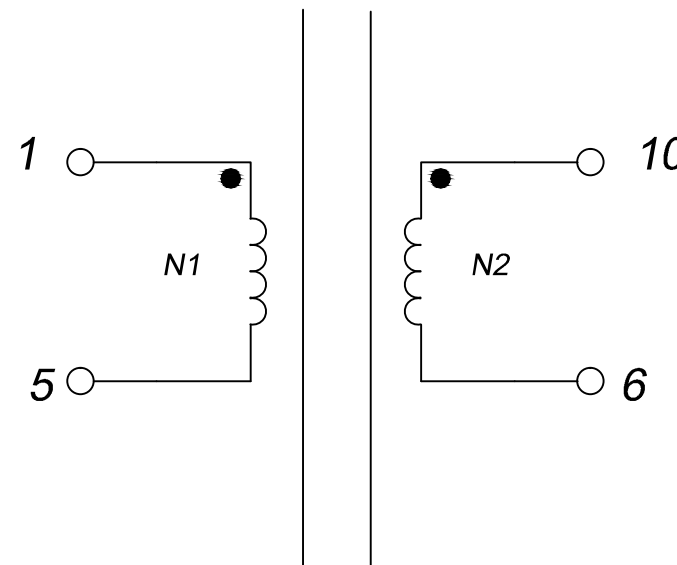

### 3. Material List

Core:FW40-EF12.6  
 Bobbin:EF12.6-1211-1  
 Wire:2UEW-0.18mm 155°C  
 Operating Temperature: -30 to 115°C

### 4. Electrical Specification

Inductance:  $L(1-5) = (10-6) = 12.0\text{mH} \pm 30\%$  10KHZ 0.05V  
 Hi-pot: P-S=AC0.5KV 2S 3mA 50Hz

REV.	DATE	 Convention Placement	DRW.	Drawing Title: <b>TRANSFORMER</b> Customer P/N:	Part No:
0	06/01		CHK.		FWPTEF12.6H122M
<b>RoHS</b>		<a href="http://www.ferriwo.com">www.ferriwo.com</a>	APP.		Specification Sheet 1 of 1