



CUSTOMER TERMINAL	ROHS	Lead(Pb)-free
	Yes	Yes



1. Mechanical Dimensions: (mm)

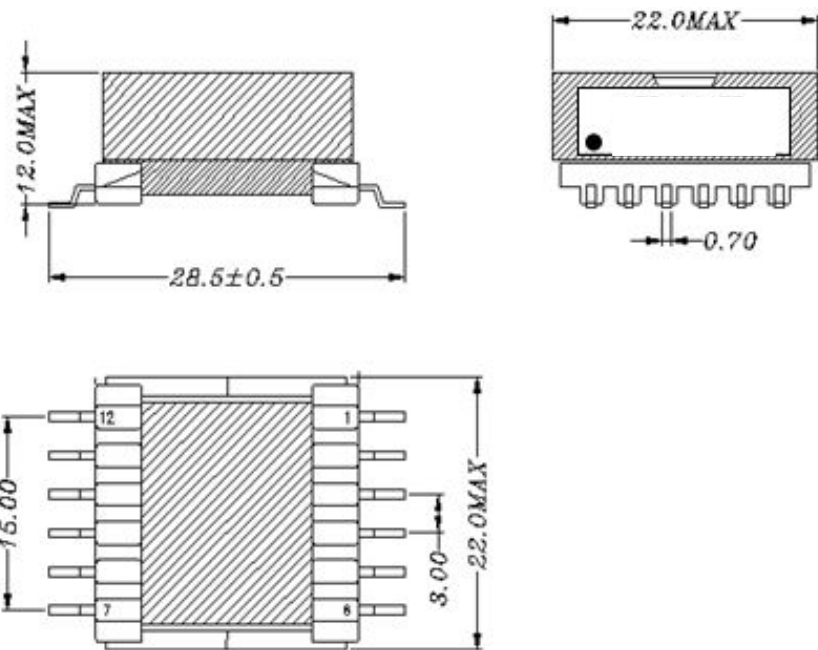

2. Schematic Diagram

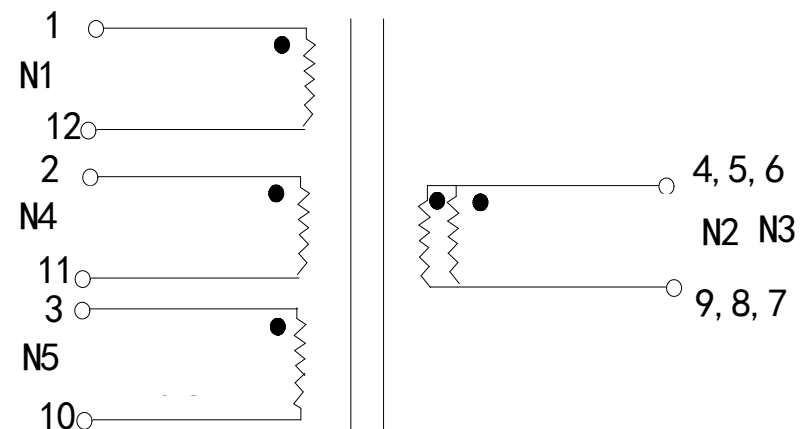


3. Material List

Core:FW40 EFD20
 Bobbin: FWB2002 6+6PIN
 Wire: 2UEW-F-Ø0.32mm, Ø0.18mm.
 Tape: 14mm/w

4. Electrical Specification

Inductance: L (1-12): 32uH±10% , (250KHZ 0.7V)
 Dielectric Strength: Between P-S No Break-down Applied AC 1500V/1mA/60S
 Dielectric Strength: Between coil-core No Break-down Applied 1000V/1mA/60S

REV.	DATE	 Convention placement	DRW.	DRAWING TITLE	Part No:		
0	03/15		CHK.			TRANSFORMER Customer P/N:	FWPTEFD20SMD320K
			APP.				
RoHS		www.ferriwo.com					