



CUSTOMER TERMINAL	ROHS	Lead(Pb)-free
	YES	YES

1. Mechanical Dimensions

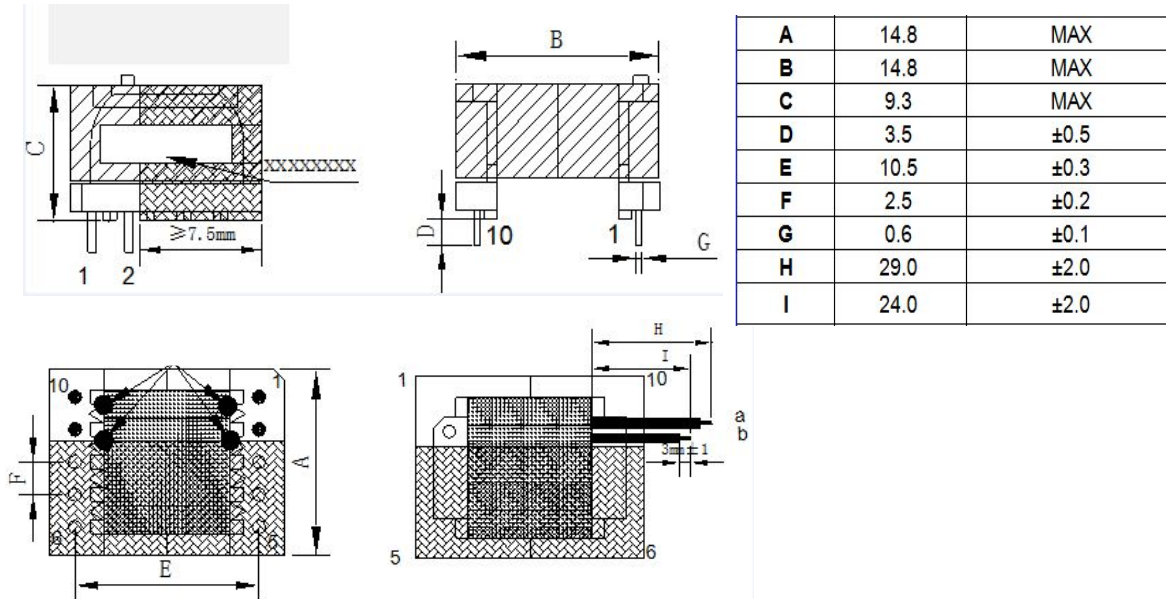

2. Schematic Diagram

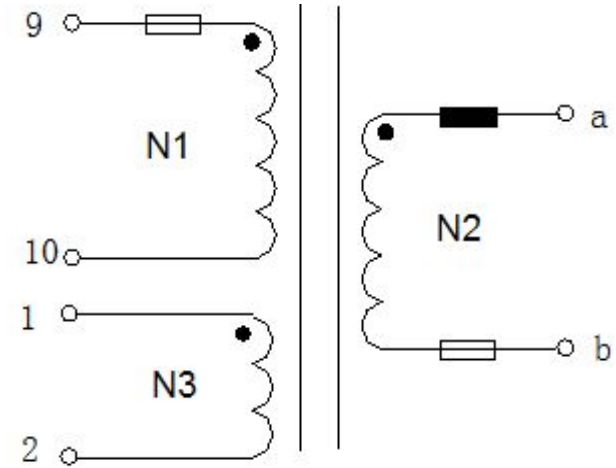

3. Material List

Core:FW44 EPC13
 Bobbin:FWB1311(5+5PIN)
 Wire:2UEW TIW
 Copper foil: 0.025t*5.0mm
 Operating Temperature: -30 to115 °C

4. Electrical Specification

Inductance : L(9-10):2mH±10% 100KHZ, 1.0V
 Leakage inductance : 105uH MAX 100KHZ, 1.0V
 DCR : (9-10)=7.5Ω MAX
 Hi-Pot:P-S-CORE: AC 60Hz 4000V 2mA 3S

REV.	DATE	 Convention Placement	DRW.	Drawing Title:	Part No:		
0	00/00		CHK.			TRANSFORMER	FWPTEPC13H202K
			APP.			Customer P/N	Specification Sheet 1of 1

ROHS

www.ferriwo.com