


CUSTOMER TERMINAL	ROHS	Lead(Pb)-free
	YES	YES

## 1. Mechanical Dimensions

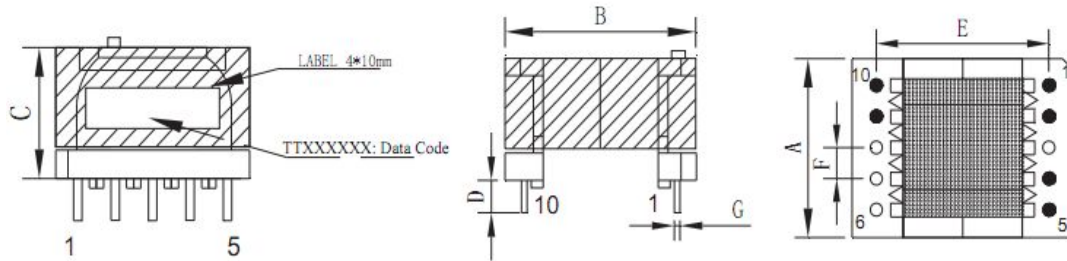

<b>A</b>	14.0	MAX
<b>B</b>	14.0	MAX
<b>C</b>	7.0	MAX
<b>D</b>	2.0	-0.3 +0.1
<b>E</b>	10.5	±0.2
<b>F</b>	2.5	±0.2
<b>G</b>	0.6	±0.1

## 3. Material List


Core:FW44 EPC13

Bobbin:FWB1311(5+5PIN)

Wire:2UEW

Operating Temperature: -30 to115 °C

## 2. Schematic Diagram

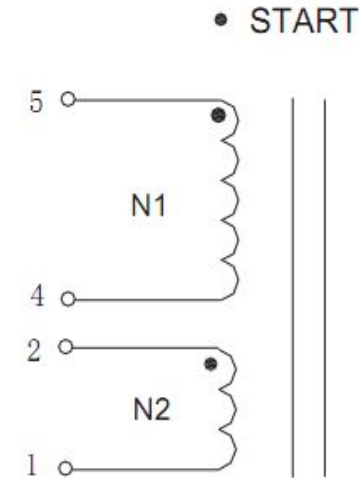

## 4. Electrical Specification

Inductance :  $L(4-5):650\mu H \pm 5\%$  100KHZ, 0.6V

DCR :  $(4-5)=2.3\Omega$  MAX

Hi-Pot:P-S-CORE: AC 60Hz 1000V 2mA 3S

REV.	DATE	<p>Convention Placement</p>	DRW.	Drawing Title:	Part No:		
0	00/00		CHK.			<b>TRANSFORMER</b>	FWPTEPC13H651K
			APP.			Customer P/N	Specification Sheet 1of 1
<b>ROHS</b>		<a href="http://www.ferriwo.com">www.ferriwo.com</a>					