



CUSTOMER TERMINAL	ROHS	Lead (Pb) -free
	YES	YES



1. Mechanical Dimensions

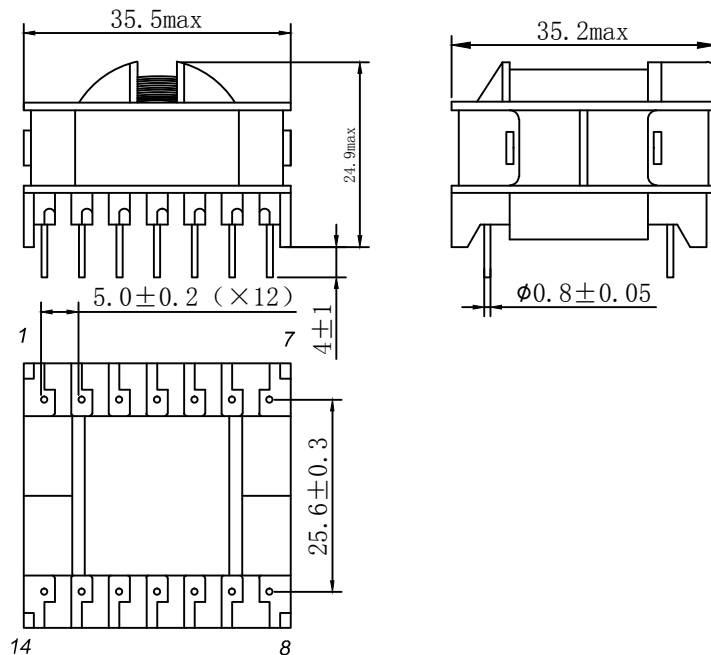

2. Schematic Diagram

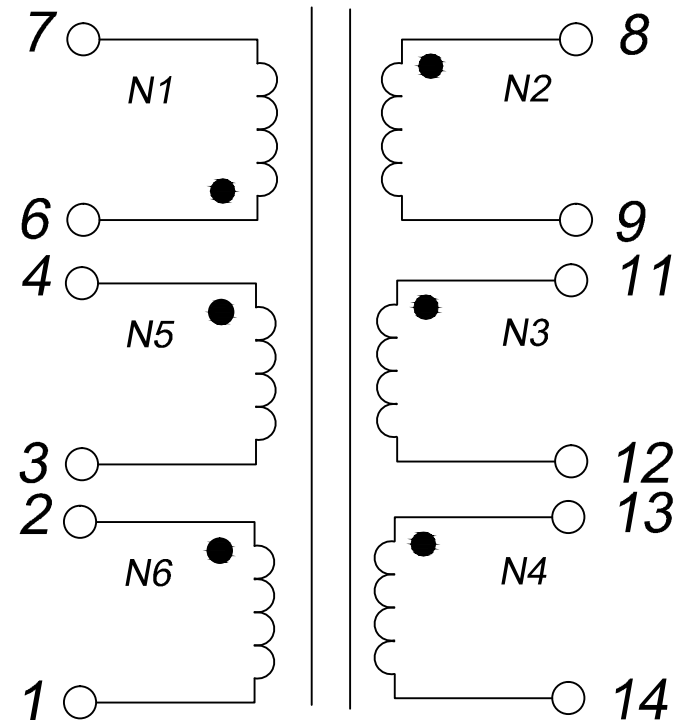

3. Material List

Core:ETD29
 Bobbin:ETD29 7+7PIN
 Wire:TIW-B
 Operating Temperature: -40 to 70°C

4. Electrical Specification

Inductance: $L(6-7) = 1.6\text{mH} \pm 5\% \text{ 1.0KHZ 1.0V}$
 Leakage Inductance: $LK(6-7) = 7\text{uHmax 100.0KHZ 1.0V}$
 HI-POT: P-S AC4000V 2mA 60S
 HI-POT:P,S-CORE AC1500V 2mA 60S

REV.	DATE	 Convention Placement	DRW.	Drawing Title: TRANSFORMER Customer P/N:	Part No:
0	04/14		CHK.		FWPT ETD29H 162J
RoHS		www.ferriwo.com	APP.		Specification Sheet 1 of 1