



CUSTOMER TERMINAL	ROHS	Lead (Pb) -free
	YES	YES



1. Mechanical Dimensions

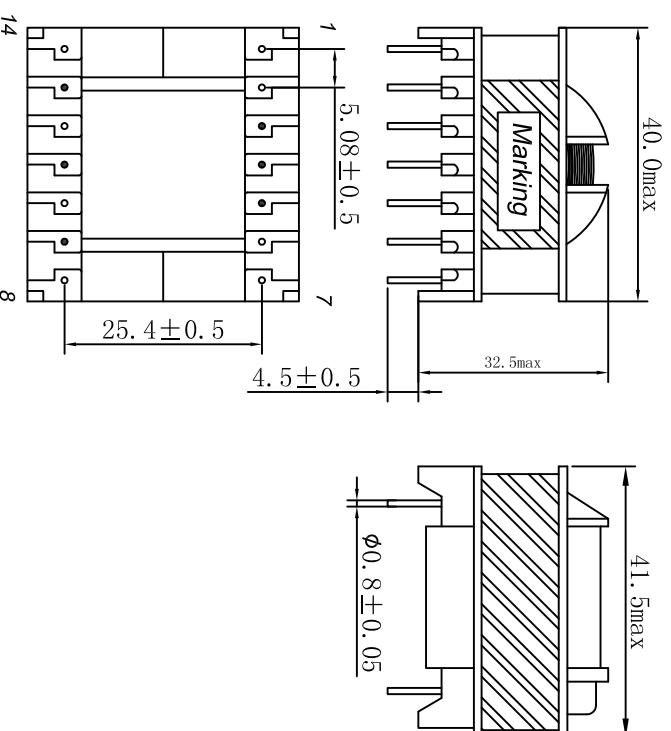

2. Schematic Diagram

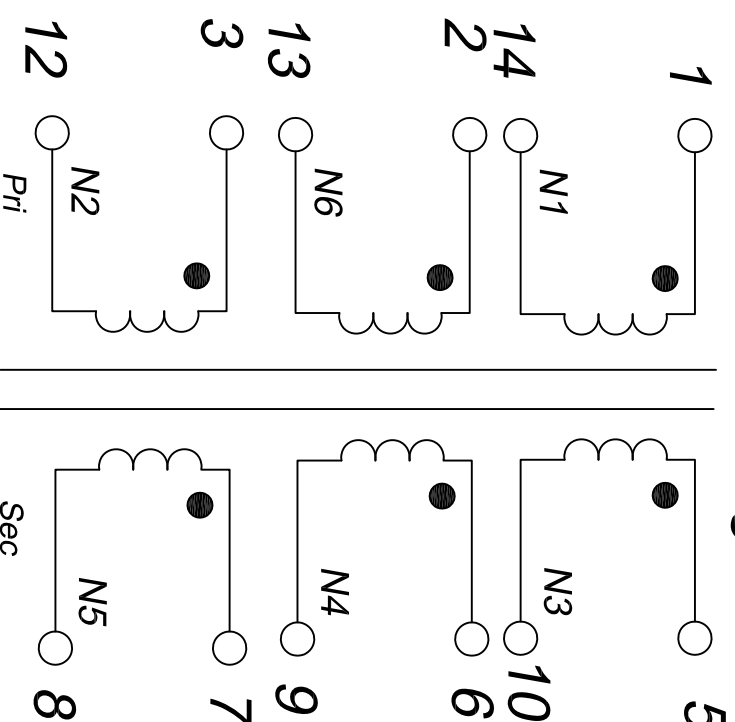

3. Material List

Core:FW40-ETD34
 Bobbin: FWB3401 7+7PIN
 Wire:TIW-B 2UEW
 Operating Temperature: -30 to 115°C

4. Electrical Specification

Inductance: L (2-14) =190uH±10% 10KHZ 0.05V
 DCR(2-14):200mΩ max, DCR(3-12):35mΩ max
 DCR(5-10):16mΩ max, DCR(6-9):16mΩ max
 DCR(7-8):16mΩ max
 HI-POT: P-S AC 4000V 5mA 2SECONDS

REV.	DATE	 Convention Placement www.ferriwo.com	DRW.	Drawing Title: TRANSFORMER Customer P/N:	Part No:
0	04/14		CHK.		FWPTETD34H191K
			APP.	Specification Sheet 1 of 1	