


CUSTOMER TERMINAL	ROHS	Lead(Pb)-free
	YES	YES

1. Mechanical Dimensions

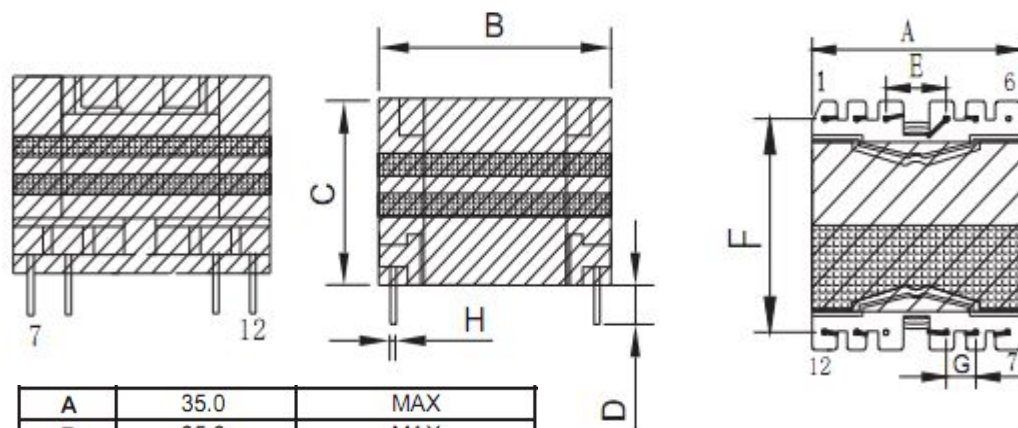

A	35.0	MAX
B	35.0	MAX
C	23.5	MAX
D	3.5	±0.5
E	7.6	±0.3
F	30.0	±0.4
G	5.0	±0.3
H	0.80	±0.1

3. Material List

Core:FW44 PQ3220


Bobbin:FWB3201-1(6+6PIN)

Wire: TIW 2UEW

Copper foil:0.025t*8.0mm

Operating Temperature: -30 to115 °C

2. Schematic Diagram

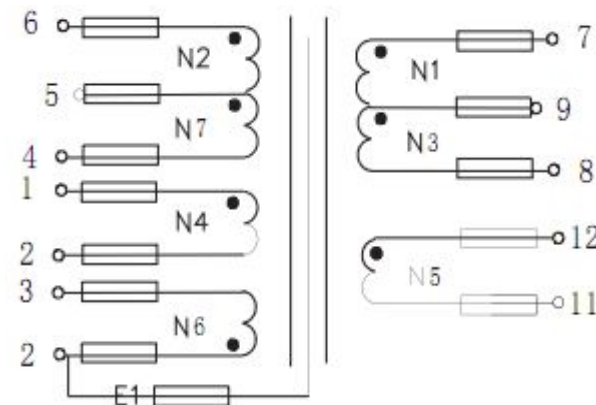

4. Electrical Specification

Inductance : $L(6-4):1300\mu H \pm 5\%$ 40KHZ , 1.0V

Leakage Inductance : 13uH MAX 40KHZ , 1.0V

DCR : (4-6)=0.589Ω MAX (8-7)=187.4mΩ MAX

Hi-Pot:P-S: AC 60Hz 4000V 1mA 3S

P-CORE: AC 60Hz 500V 1mA 3S

REV.	DATE	<p>Convention Placement</p>	DRW.	Drawing Title:	Part No:		
0	00/00		CHK.			TRANSFORMER	FWPTPQ3220V132J
			APP.			Customer P/N	Specification Sheet 1of 1

ROHS

www.ferriwo.com