


CUSTOMER TERMINAL	ROHS	Lead(Pb)-free
	YES	YES

## 1. Mechanical Dimensions

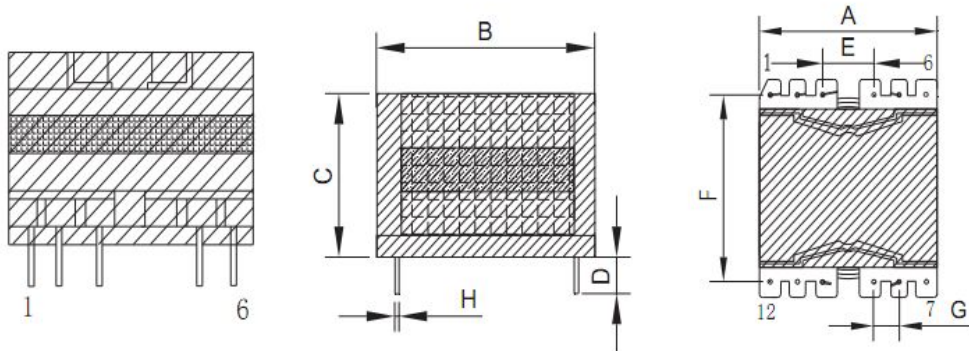

A	35.0	MAX
B	35.4	MAX
C	26.5	MAX
D	3.5	±0.5
E	7.4	±0.3
F	30.0	±0.4
G	5.0	±0.2
H	0.80	±0.1

## 3. Material List

Core:FW44 PQ3225


Bobbin:FWB3202-1(6+6PIN)

Wire: 2UEW LITZ

Copper foil:0.025t\*10.0/20.0mm

Operating Temperature: -30 to115 °C

## 2. Schematic Diagram

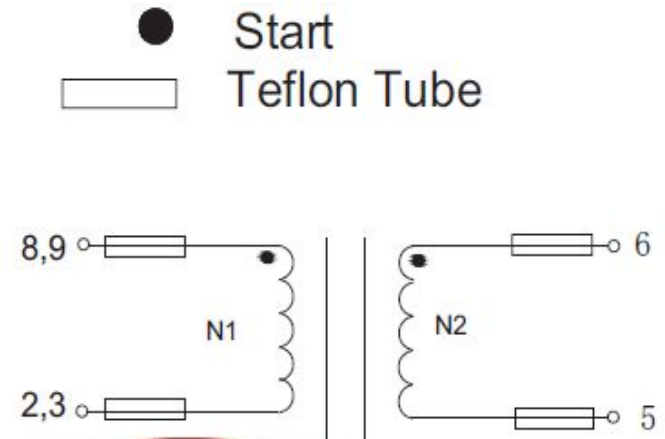

## 4. Electrical Specification

Inductance :  $L(8,9-2,3):190\mu H \pm 5\% 40KHZ, 1.0V$

DCR :  $(8,9-2,3)=87.6m\Omega MAX$

Hi-Pot:N1-N2-CORE: AC 60Hz 1000V 1mA 3S

REV.	DATE	<p>Convention Placement</p>	DRW.		Drawing Title:	Part No:
0	00/00		CHK.			
			APP.		Customer P/N	Specification Sheet 1of 1

**ROHS**

[www.ferriwo.com](http://www.ferriwo.com)