



CUSTOMER TERMINAL	ROHS	Lead(Pb)-free
	YES	YES

1. Mechanical Dimensions

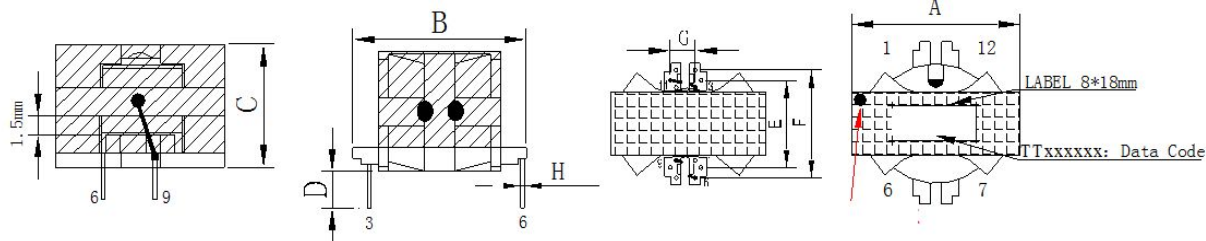

A	30.0	MAX
B	29.0	MAX
C	20.0	MAX
D	3.5	±0.5
E	21.6	±0.4
F	25.2	±0.3
G	5.4	±0.3
H	0.60	±0.1

2. Schematic Diagram

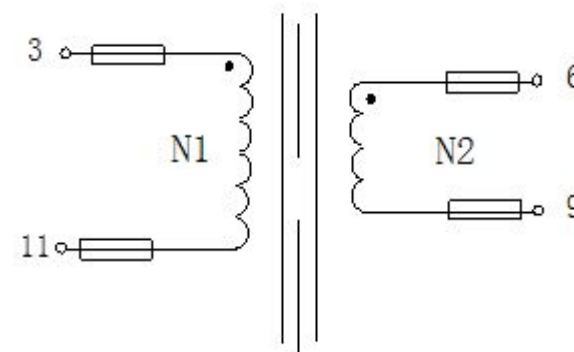

3. Material List

Core:FW44 RM10

Bobbin:FWB1005(6+6PIN)

Wire:2UEW LITZ

Copper foil: 0.025t*5.0/8.0mm

Operating Temperature: -30 to115 °C

4. Electrical Specification

Inductance : L(3-11):800uH±5% 30KHZ , 1.0V

DCR : (3-11)=472.6mΩ MAX

Hi-Pot:N1-N2: AC 60Hz 1000V 1mA 3S

N1-CORE:AC 60Hz 1000V 1mA 3S

REV.	DATE	<p>Convention Placement</p>	DRW.	Drawing Title: TRANSFORMER	Part No: FWPTRM10V801J
0	00/00		CHK.		
			APP.		
ROHS		www.ferriwo.com	Customer P/N	Specification Sheet 1of 1	