



| | | |
|-------------------|------|---------------|
| CUSTOMER TERMINAL | ROHS | Lead(Pb)-free |
| | YES | YES |



1.Mechanical Dimensions

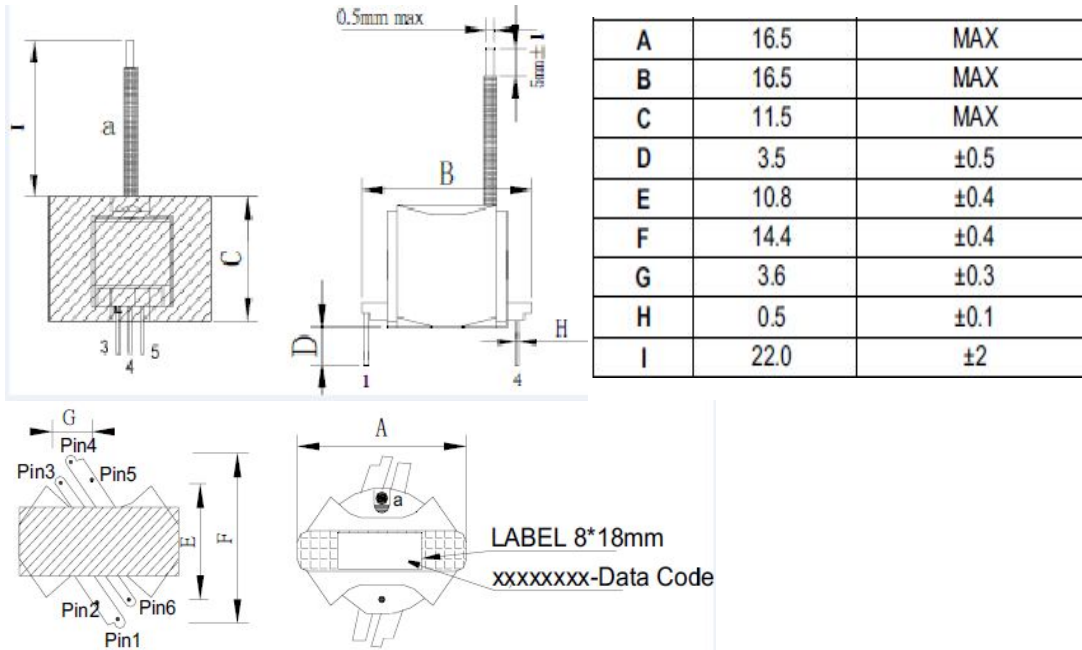

2.Schematic Diagram

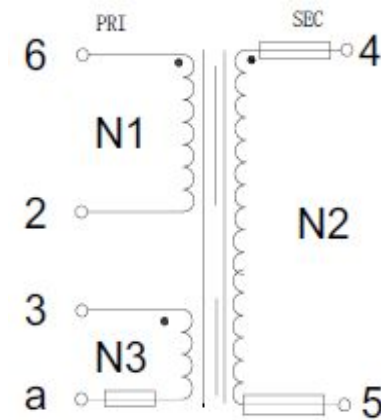

3.Material List

Core:FW44 RM5
 Bobbin:FWB0501(3+3PIN)
 Wire:2UEW
 Operating Temperature: -30 to115 °C

4.Electrical Specification

Inductance : L(6-2):3.4mH ±5% 50KHZ , 1.0V
 Leakage inductance : 240uHMAX 50KHZ , 1.0V
 DCR : (6-2)=8.5Ω MAX
 Hi-Pot:P-S: AC 60Hz 1000V 1mA 3S

| | | | | | | | |
|------|-------|--------------------------|------|----------------|----------|--------------------|---------------------------|
| REV. | DATE | Convention Placement | DRW. | Drawing Title: | Part No: | | |
| 0 | 00/00 | | CHK. | | | TRANSFORMER | FWPTRM5V342J |
| | | | APP. | | | Customer P/N | Specification Sheet 1of 1 |

ROHS

www.ferriwo.com